




KERAMIKA
KANJIŽA


APOLON	8
APOLON	103
BRECCIA SARDA	11
BRECCIA SARDA	76
BIANCA	148
CEMENT	25
CASTELLO	65
CARRARA	140
DOMUS	53
EAGLE	82
FORUM	43
FEELING	49
HARDROCK	46
HABITAT	144
IMPERIAL	88
JUPITER	30
JUPITER	115
JOY	129
KINGSTONE	136
LUXOR	14
LUXOR	98
LAND	56
MARVEL	108
MARMO BIANCO	17
MARMO BIANCO	70
MARMO BIANCO MAT	112
MERCURY	132
MAIOLICA	59
RAPOLANO	40
SPACE	20
SPACE	120
SNOW	94
SMART	125
VEGA	36
VIA STRADA	62

 **MONOKOLORI MONOCOLORS**


BIANCA	148
JOY	129
SNOW	94

 **RUSTIK RUSTIC**


MAIOLICA	59
----------	----

 **TEKSTIL TEXTILE**


HABITAT	144
---------	-----

 **DRVO WOOD**


DOMUS	53
FEELING	49

 **BETON CONCRETE**





CEMENT	25
SMART	125
MERCURY	132
EAGLE	82

 **MERMER MARBLE**

BRECCIA SARDA	11
BRECCIA SARDA	76
CARRARA	140
IMPERIAL	88
LUXOR	14
LUXOR	98
MARVEL	108
MARMO BIANCO	17
MARMO BIANCO	70
MARMO BIANCO MAT	112

 **KAMEN STONE**

APOLON	8
APOLON	103
CASTELLO	65
FORUM	43
HARDROCK	46
JUPITER	30
JUPITER	115
KINGSTONE	136
LAND	56
RAPOLANO	40
SPACE	20
SPACE	120
VEGA	36
VIA STRADA	62



RETT

RETT

APOLON		•		
APOLON				
BRECCIA SARDA		•		
BRECCIA SARDA	•			
BIANCA				
CEMENT		•	•	
CASTELLO				
CARRARA				
DOMUS				
EAGLE	•			
FORUM				
FEELING				
HARDROCK				
HABITAT				
IMPERIAL	•			
JUPITER		•	•	
JUPITER				
JOY				
KINGSTONE				
LUXOR		•		
LUXOR	•			
LAND				
MARVEL				
MARMO BIANCO		•		
MARMO BIANCO	•			
MARMO BIANCO MAT				
MERCURY				
MAIOLICA				
RAPOLANO				
SPACE		•		
SPACE				
SNOW	•			
SMART				
VEGA		•		
VIA STRADA			•	

20x60

30x60

25x50

45x45

33x33

					8
	•				103
					11
			•		76
		•			148
					25
				•	65
		•	•		140
			•		53
			•		82
	•				43
	•				49
	•				46
		•		•	144
			•		88
					30
	•				115
•					129
		•	•		136
					14
					98
				•	56
	•				108
					17
					70
	•				112
		•		•	132
				•	59
	•				40
					20
	•				120
					94
•			•		125
					36
				•	62

GRES PORCELAIN

KERAMIKA
KANJIZA





Apolon DARK_ 59x59 RETT

Vrhunski dizajn podne pločice Apolon ogleda se u bogatstvu detalja, vena, šara i nepravilnosti verno reprodukovanih kao kameni dekor. Ovo je veoma „jak“ i upečatljiv dizajn, koji čini Apolon raskošnom i luksuznom serijom, uz sve visoke standarde i performanse koje ispunjava.

The superior design of the Apollo floor tile is reflected in the wealth of details, veins, patterns and irregularities faithfully reproduced as stone decor. This is a very "strong" and striking design, which makes Apollo a lavish and luxurious series, with all the high standards and performances it meets.



59x59 RETT
9mm

NOVO
NEW

APOLON

REKTIFIKOVANE GRES PLOČICE
RECTIFIED GRES PORCELAIN



APOLON DARK 59x59 cm RETT / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNJENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

KERAMIKA
KANJIZA



59x59 RETT
9mm

BRECCIA SARDA

REKTIFIKOVANE GRES PLOČICE
RECTIFIED GRES PORCELAIN

Savršena i veoma realistična reprodukcija kamena koji vodi poreklo sa Sardinije prenela je svu lepotu detalja i bogatstvo šara na našu novu seriju Breccia. Osim osnovnog dekora, ova serija obogaćena je i floralnom grafikom čineći je idealnim izborom za sve ljubitelje vanvremenske raskoši i luksuza.

The perfect and very realistic reproduction of the stone originating from Sardinia transferred all the beauty of the details and the richness of the patterns to our new Breccia series. In addition to the basic decor, this series is enriched with floral graphics, making it an ideal choice for all lovers of timeless luxury.

Breccia SARDA_ 59x59 RETT





DIN 51097 DIN 51130



PEI
4

5

BRECCIA SARDA 59x59 cm **RETT** / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Luxor_59x59 RETT

Mermer kao večita inspiracija za opremanje enterijera. Seriju Luxor čine detalji crnog mermera sa modernim i upadljivim venama. Odličan je izbor za postizanje efekta raskoši i vanvremenske elegancije.


Marble as an eternal inspiration for interior design. The Luxor series consists of a details of black marble with modern and striking veins. It is an excellent choice for achieving the effect of luxury and timeless elegance.



59x59 RETT
9mm

LUXOR

REKTIFIKOVANE GRES PLOČICE
RECTIFIED GRES PORCELAIN

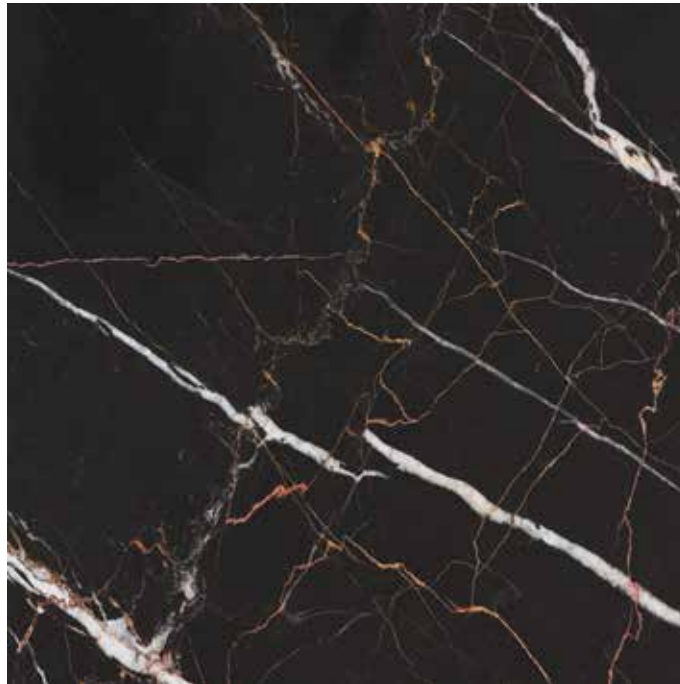

PEI
2

6

LUXOR 59x59 cm **RETT** / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

KERAMIKA
KANJIZA



59x59 RETT
9mm

MARMO BIANCO

REKTIFIKOVANE GRES PLOČICE
RECTIFIED GRES PORCELAIN



Marmo BIANCO_ 59x59 RETT

Nova zvezda u Keramika Kanjiža ponudi reprodukcija je serija Marmo. Prelepa grafika mermera sa verno predstavljanim venama i šarama pripada luksuznoj ponudi brenda Keramika Kanjiža. Idealna je za sve ljubitelje luksuza i vanvremenske lepote koja odoleva promeni trendova. Savršeno se uklapa u bele i elemente u boji svetlog drveta.

The new star in the Keramika Kanjiža offer of reproductions is the Marmo series. Beautiful marble graphics with faithfully presented veins and patterns belong to the luxury offer of the Keramika Kanjiža brand. It is ideal for all lovers of luxury and timeless beauty that resists changing trends. It fits perfectly in white and light wood color elements.



MARMO BIANCO 59x59 cm **RETT** / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Space BEIGE_59x59 RETT

Jednostavnost i elegancija sinonimi su za novu seriju pločica Space. Upravo zbog toga, idealno se uklapaju uz različite stilove opremanja od minimalizma, preko klasičnog, pa sve do industrijskog. Zbog svoje mirne grafike, možete ih uklapati uz široku paletu boja, u zavisnosti od ličnog afiniteta i stila.

Simplicity and elegance are synonymous for the new Space tile series. Precisely because of that, they fit perfectly with different styles of furnishing - from minimalism, through classic, all the way to industrial. Due to their calm graphics, you can fit them with a wide range of colors, depending on personal affinity and style.



59x59 RETT
9mm

SPACE


REKTIFIKOVANE GRES PLOČICE
RECTIFIED GRES PORCELAIN



Space TITAN_ 59x59 RETT



DIN 51097 DIN 51130

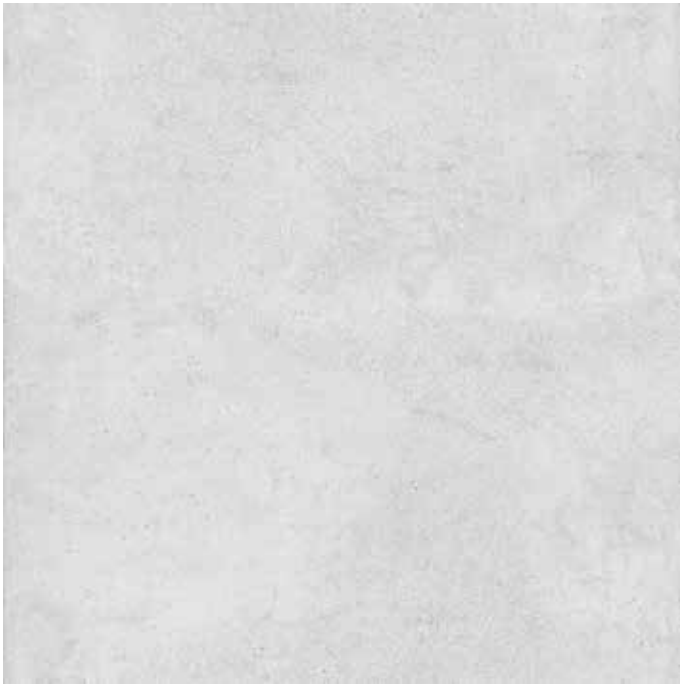

PEI 4
8

SPACE LIGHT GREY RETT 59x59 cm / FT



PEI 4
8

SPACE BEIGE RETT 59x59 cm / FT



PEI 3
8

SPACE TITAN RETT 59x59 cm / FT



*Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length*

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNJENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Cement SMOKE_29,5x59 RETT

Već nekoliko godina apsolutni favorit u opremanju enterijera je reprodukcija betona, idealno preneti na seriju Cement. Boje su izabrane tako da će vašem prostoru pružiti osećaj topline, čak i ako se odlučite za industrijski stil opremanja enterijera.

For several years now, the absolute favorite in interior design has been the reproduction of concrete, ideally transferred to the Cement series. The colors are chosen so that they will give your space a feeling of warmth, even if you opt for an industrial style of interior design.



29,5x59 RETT
8,8mm

59x59 RETT
9mm

CEMENT

REKTIFIKOVANE GRES PLOČICE
RECTIFIED GRES PORCELAIN


CEMENT



Cement BEIGE_ 59x59 RETT



Cement LIMESTONE_ 29,5x59 RETT
Cement BONE_ 59x59 RETT



DIN 51097
DIN 51130



PEI 4

8

CEMENT BONE 29,5x59 cm RETT / FT/WT



PEI 4

8

CEMENT BEIGE 29,5x59 cm RETT / FT/WT



PEI 3

8

CEMENT SMOKE 29,5x59 cm RETT / FT/WT



PEI 4

8

CEMENT LIMESTONE 29,5x59 cm RETT / FT/WT




*Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length*

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
29,5x59	0,17405	6	1,044	19,05	50,112	945,00	FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



DIN 51097 DIN 51130

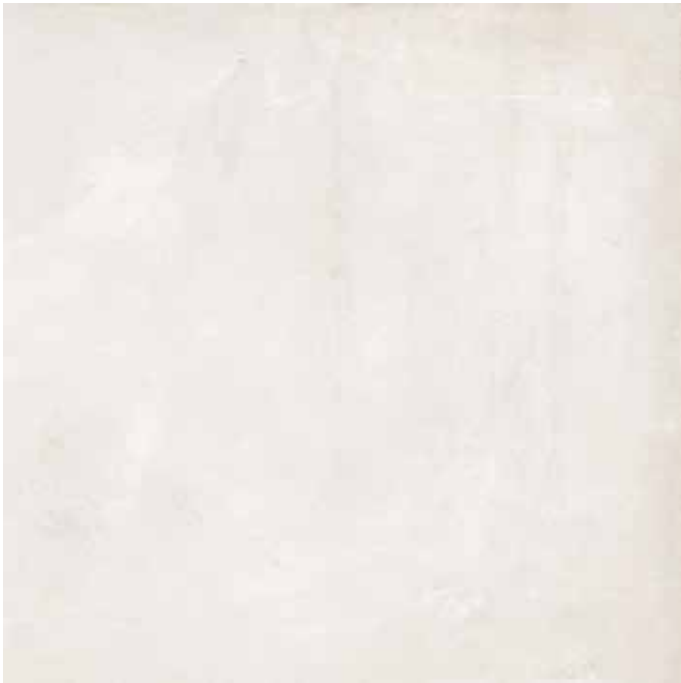

PEI 4

8

CEMENT BONE RETT 59x59 cm / FT



PEI 4

8

CEMENT BEIGE RETT 59x59 cm / FT



PEI 3

8





CEMENT SMOKE RETT 59x59 cm / FT



PEI 4

8

CEMENT LIMESTONE RETT 59x59 cm / FT





Jupiter ICE_29,5x59 RETT
Jupiter DARK_29,5x59 RETT

Bogata grafika kamena prenesena je na seriju Jupiter. Uz neverovatne detalje, odlikuju je i tri pažljivo odabrane boje koje se mogu uklapati u najrazličitije ambijente i stilove. Za koju god boju da se opredelite, pločice iz ove serije prostoriji pružaju raskošan izgled.

Rich stone graphics is transferred to Jupiter series. In addition to incredible details, it is characterized by three carefully selected colors that can fit into a variety of ambiances and styles. Whatever color you choose, the tiles from this series provide your rooms a luxurious look.



29,5x59 RETT
8,8mm

59x59 RETT
9mm

JUPITER


REKTIFIKOVANE GRES PLOČICE
RECTIFIED GRES PORCELAIN

JUPITER



Jupiter ICE_ 29,5x59 RETT
Jupiter DARK_ 29,5x59 RETT
Jupiter DARK_ 59x59 RETT





DIN 51097 DIN 51130



PEI 4

12

JUPITER ICE 29,5x59 cm **RETT** / FT/WT



PEI 4

12

JUPITER BEIGE 29,5x59 cm **RETT** / FT/WT



PEI 3

12

JUPITER DARK 29,5x59 cm **RETT** / FT/WT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNJENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
29,5x59	0,17405	6	1,044	19,05	50,112	945,00	FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



DIN 51097 DIN 51130



PEI 4

8

JUPITER R ICE 59x59 cm RETT / FT



PEI 4

8





JUPITER R BEIGE 59x59 cm RETT / FT



PEI 3

8

JUPITER R DARK 59x59 cm RETT / FT





Vega DESERT_29,5x59 RETT

Mirni tonovi i suptilni detalji grafike čine seriju Vega idealnim izborom za sve ljubitelje minimalizma. Zahvaljujući neutralnim bojama, ova pločica prostoru daje čist i uredan izgled, zbog čega je veoma lako uklapati nameštaj i različite boje detalja uz nju.

The calm tones and subtle details of the graphics make the Vega series an ideal choice for all lovers of minimalism. Thanks to the neutral colors, this tile gives the space a clean and tidy look, which makes it very easy to fit furniture and different colors of details along with it.



29,5x59 RETT
8,8mm





59x59 RETT
9mm

VEGA

REKTIFIKOVANE GRES PLOČICE
RECTIFIED GRES PORCELAIN




Vega_29,5x59 RETT
 Vega DESERT_29,5x59 RETT
 Vega_59x59 RETT



Preporučena fuga / Recommended grout 3 mm
 Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNJENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
29,5x59	0,17405	6	1,044	19,05	50,112	945,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	FT FLOOR TILES / PODNE PLOČICE M ²
							RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



DIN 51097 DIN 51130



PEI 4

12

VEGA CREMA 29,5x59 cm **RETT** / FT/WT



PEI 4

4

VEGA DESERT 29,5x59 cm **RETT** / FT/WT



DIN 51097 DIN 51130



PEI 4

6

VEGA CREMA 59x59 cm **RETT** / FT

Pločice serije Rapolano odlikuje bogatstvo detalja mediteranskog kamena. Tople nijanse upotpunjuju osećaj udobnosti, zbog čega je ova serija dobar izbor za letnjikovce, bašte i terase. Savršeno se slaže uz rustične detalje i stil opremanja.

The tiles of the Rapolano series are characterized by a wealth of details of Mediterranean stone. Warm shades complete the feeling of comfort, which is why this series is a good choice for summer houses, gardens and terraces. It goes perfectly with rustic details and style of furnishing.

Rapolano MONTI_30x60



RAPOLANO

GRES PLOČICE
GRES PORCELAIN



30x60
8,8mm

KERAMIKA
KANJIZA



PEI 4

10

RAPOLANO MONTI 30x60 cm / FT



PEI 3

9

RAPOLANO TRASTEVERE 30x60 cm / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
30x60	0,1800	6	1,080	19,29	51,840	960,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

KERAMIKA
KANJIZA



30x60
8,8mm

FORUM

GRES PLOČICE
GRES PORCELAIN

Stari, pohabani kamen postao je imperativ u opremanju enterijera. Njegova lepota je u mogućnosti kombinovanja sa različitim stilovima. I ako je reč o imitaciji kamena, pažljiv odabir boja pločica serije Forum za krajnji rezultat pruža efekat vanvremenske topline enterijera.

Old, shabby stone has become an imperative in interior design. Its beauty is in possibility to be combined with different styles. And when it comes to the imitation of stone, careful selection of tile colors of the Forum series for the end result provides the effect of timeless warmth of interior.

Forum LIGHT_30x60





PEI
4

8

FORUM LIGHT 30x60 cm / FT










PEI
4

8

FORUM SAND 30x60 cm / FT



*Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length*

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
30x60	0,1800	6	1,080	19,29	51,840	960,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

Topli tonovi zemlje i peska odlika su serije Hardrock. Ova pločica za spoljnu upotrebu idealna je za bašte, terase i stepeništa. Zahvaljujući lepoti detalja, za koju god boju da se odlučite vaša mala oaza mira dobiće prefinjen izgled mediteranskog stila.

Warm tones of soil and sand are the hallmarks of the Hardrock series. This tile for outdoor use is ideal for gardens, terraces and staircases. Thanks to the beauty of the details, whatever color you choose, your little oasis of peace will get a refined look of the Mediterranean style.

Hardrock WHITE_30x60



HARDROCK

*GRES PLOČICE
GRES PORCELAIN*



*30x60
8,8mm*

KERAMIKA
KANJIZA



DIN 51097 DIN 51130



HARDROCK WHITE 30x60cm / FT



HARDROCK TERRA 30x60 cm / FT



HARDROCK GREY 30x60 cm / FT



*Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length*

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
30x60	0,1800	6	1,080	19,29	51,840	960,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

KERAMIKA
KANJIZA



30x60
8,8mm

FEELING

GRES PLOČICE
GRES PORCELAIN



Feeling NOCE_30x60

Dekor drveta kao večna elegancija. Svi detalji i umeren reljef drveta preneti su na seriju Feeling. Tri boje u okviru ove serije odabrane su tako da se uklapaju dobro uz rustični, skandinavski ili minimalistički stil opremanja. Odabirom ove serije sigurno ćete postići efekat elegancije i topline u svom prostoru.

Wood decor as eternal elegance. All the details and moderate relief of the wood have been transferred to the Feeling series. The three colors within this series have been chosen to fit well with the rustic, Scandinavian or minimalist style of furnishing. By choosing this series, you will surely achieve the effect of elegance and warmth in your space.



Feeling BEIGE_30x60



PEI 4

8

FEELING BEIGE 30x60 cm / FT



PEI 4

8

FEELING ANTICO 30x60 cm / FT



PEI 4

8

FEELING NOCE 30x60 cm / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
15x60	0,0900	11	0,990	18,60	55,440	1075,00	FT FLOOR TILES / PODNE PLOČICE M ²
30x60	0,1800	6	1,080	19,29	51,840	960,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

KERAMIKA
KANJIZA



45x45
8,2mm

DOMUS

GRES PLOČICE
GRES PORCELAIN

Serija Domus je jedna od najstarijih reprodukcija drveta u asortimanu Keramika Kanjiža. Rustično, pohabano drvo sa neverovatno realnim detaljima čini je omiljenom među podnim pločicama. Četiri boje u okviru ove serije omogućavaju kombinovanje uz različite stilove, bilo da ste ljubitelj minimalizma, boho chic-a ili rustike.

The Domus series is one of the oldest wood reproductions in the Keramika Kanjiža range. Rustic, worn wood with incredibly realistic details makes it a favorite among floor tiles. The four colors within this series allow you to combine with different styles, whether you are a fan of minimalism, boho chic or rustic.

Domus NOCE_45x45





PEI 4
2

DOMUS ANTICO 45X45 cm / FT



PEI 4
2

DOMUS NOCE 45X45 cm / FT



PEI 4
5

DOMUS RUSTICO 45X45 cm / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
45x45	0,2025	8	1,620	29,40	71,280	1325,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

Još jedna imitacija kamena i zemljani tonovi čine seriju Land. Tople nijanse idealne su za postizanje efekta mediteranskog stila opremanja.

Another imitation of stone and earth tones make up the Land series. Warm shades are ideal for achieving the effect of a Mediterranean style of furnishing.

Land GREY_33x33



KERAMIKA
KANJČA



33x33
7,3mm

LAND

GRES PLOČICE
GRES PORCELAIN



DIN 51097 DIN 51130



PEI
4

5

LAND GREY 33x33 cm / FT



Preporučena fuga / Recommended grout 3 mm

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
33x33	0,1089	16	1,742	27,04	73,164	1165,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

KERAMIKA
KANJIZA



33x33
7,3mm

MAIOLICA

GRES PLOČICE
GRES PORCELAIN

Raskošna serija koja je oživela dekor stare keramike. Sitne pukotine i šare, sjajna glazura i prelepe boje pružice prostoru jedinstven i originalan izgled. Podne pločice iz serije Maiolica savršeno se uklapaju sa dekorima drveta.

A sumptuous series that revived the decor of old ceramics. Small cracks and patterns, shiny glaze and beautiful colors will give the space a unique and original look. Floor tiles from the Maiolica series fit perfectly with wooden decores.

*Eagle BEIGE_25x75
Maiolica VINTAGE_33x33*





DIN 51097 DIN 51130



MAIOLICA VINTAGE 33x33 cm / FT



Preporučena fuga / Recommended grout 3 mm

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
33x33	0,1089	16	1,742	27,04	73,164	1165,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Via Strada GRIGIO_33x33

Via Strada su pločice sa savršeno prenetim detaljima mozaika od kamena. Bogatstvo detalja i reljefa zaslužno je za veoma realističan izgled dekora. Ove dve serije odlično se uklapaju uz rustični stil, pa tako ne čudi što su upravo one prvi izbor kupaca za opremanje vikendica i planinskih kuća.

Via Strada are tiles with a perfectly transferred details of stone mosaics. The richness of details and relief is responsible for the very realistic look of the decor. These two series fit perfectly with the rustic style, so it is not surprising that they are the first choice of buyers for furnishing cottages and mountain houses.

KERAMIKA
KANJIZA



33x33
7,3mm

VIA STRADA

GRES PLOČICE
GRES PORCELAIN



DIN 51097 DIN 51130



VIA STRADA BEIGE 33x33 cm / FT



VIA STRADA GRIGIO 33x33 cm / FT



Preporučena fuga / Recommended grout 3 mm

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
33x33	0,1089	16	1,742	27,04	73,164	1165,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

KERAMIKA
KANJIZA



33x33
7,3mm

CASTELLO

GRES PLOČICE
GRES PORCELAIN

Reprodukcija mozaika od lomljenog kamena, pažljiv odabir nijansi i detalja čini ovu seriju favoritom za popločavanje stepeništa, staza i prilaza. Kako i samo ime kaže, bogat dekor serije Castello doprinosi postizanju efekta nekih starijih, antičkih vremena, pa je zbog toga pločica koja odoleva promeni trendova i ostaje klasika dugi niz godina.

Reproduction of crushed stone mosaics, careful selection of shades and details make this series a favorite for paving stairs, paths and approaches. As the name suggests, the rich decor of the Castello series contributes to the effect of some older, ancient times, which is why the tile is resistant to changing trends and remains a classic for many years.

Castello_33x33





PEI
4

4

CASTELLO 33x33 cm / FT



Preporučena fuga / Recommended grout 3 mm

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
33x33	0,1089	16	1,742	27,04	73,164	1165,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



ZIDNE PLOČICE
WALL TILES

KERAMIKA
KANJIŽA



Marmo BIANCO_25x75

Nova zvezda u Keramika Kanjiža ponudi reprodukcija je serija Marmo. Prelepa grafika mermera sa verno predstavljenim venama i šarama pripada luksuznoj ponudi brenda Keramika Kanjiža. Idealna je za sve ljubitelje luksuza i vanvremenske lepote koja odoleva promeni trendova. Savršeno se uklapa u bele i elemente u boji svetlog drveta.

The new star in the Keramika Kanjiža offer of reproductions is the Marmo series. Beautiful marble graphics with faithfully presented veins and patterns belong to the luxury offer of the Keramika Kanjiža brand. It is ideal for all lovers of luxury and timeless beauty that resists changing trends. It fits perfectly in white and light wood color elements.



25x75
9,2mm

59x59 RETT
9mm

MARMO BIANCO

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES

MARMO BIANCO



Marmo Bianco_25x75
Marmo Scala Bianco_25x75
Marmo Bianco_59x59 RETT





10

MARMO BIANCO 25x75 cm / WT



6

MARMO SCALA BIANCO 25x75 cm / WT



6

MARMO MOSAIC 3D BIANCO 25x75 cm / WT



PEI
4

7

MARMO BIANCO 59x59 cm RETT / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
25x75	0,1875	7	1,312	20,51	62,976	1010,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 25x75	0,1875	7	1,312	20,51	62,976	1010,00	FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Breccia Sarda_25x75
Breccia Sarda Mosaic 3D_25x75

Savršena i veoma realistična reprodukcija kamena koji vodi poreklo sa Sardinije prenela je svu lepotu detalja i bogatstvo šara na našu novu seriju Breccia. Osim osnovnog dekora, ova serija obogaćena je i floralnom grafikom čineći je idealnim izborom za sve ljubitelje vanvremenske raskoši i luksuza.

The perfect and very realistic reproduction of the stone originating from Sardinia transferred all the beauty of the details and the richness of the patterns to our new Breccia series. In addition to the basic decor, this series is enriched with floral graphics, making it an ideal choice for all lovers of timeless luxury.



25x75
9,2mm

45x45
8,2mm

59x59 RETT
9mm

BRECCIA SARDA

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES

BRECCIA SARDA



Breccia Sarda_25x75
Breccia Sarda_45x45












12

BRECCIA SARDA 25x75 cm / WT

6

BRECCIA SARDA MOSAIC 3D 25x75 cm / WT

Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							
25x75	0,1875	7	1,312	20,51	62,976	1010,00	WT WALL TILES / ZIDNE PLOČICE M ²
DECOR 25x75	0,1875	7	1,312	20,51	62,976	1010,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
45x45	0,2025	8	1,620	29,40	71,280	1325,00	FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

BRECCIA SARDA



DIN 51097 DIN 51130



PEI 4

8

BRECCIA SARDA 45x45 cm / FT

BRECCIA SARDA



DIN 51097 DIN 51130



PEI 4

5

BRECCIA SARDA 59x59 cm **RETT** / FT

Moderno, jednostavno i raskošno sinonimi su za našu novu seriju Eagle. Precizno preneti detalji cementa, odabir raskošnih boja i dekori geometrijskih šara čine ovu seriju apsolutnom zvezdom noviteta. Pravi je izbor za moderno uređene prostore i ljubitelje jednostavnosti i elegancije.

Modern, simple and luxurious are synonymous for our new Eagle series. Precisely conveyed cement details, a choice of gorgeous colors and decors of geometric patterns make this series an absolute star of novelties. It is the right choice for modern spaces and lovers of simplicity and elegance.

Eagle IVORY_25x75

Eagle Zenith Basic_25x75






25x75
9,2mm

45x45
8,2mm

EAGLE

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES

EAGLE

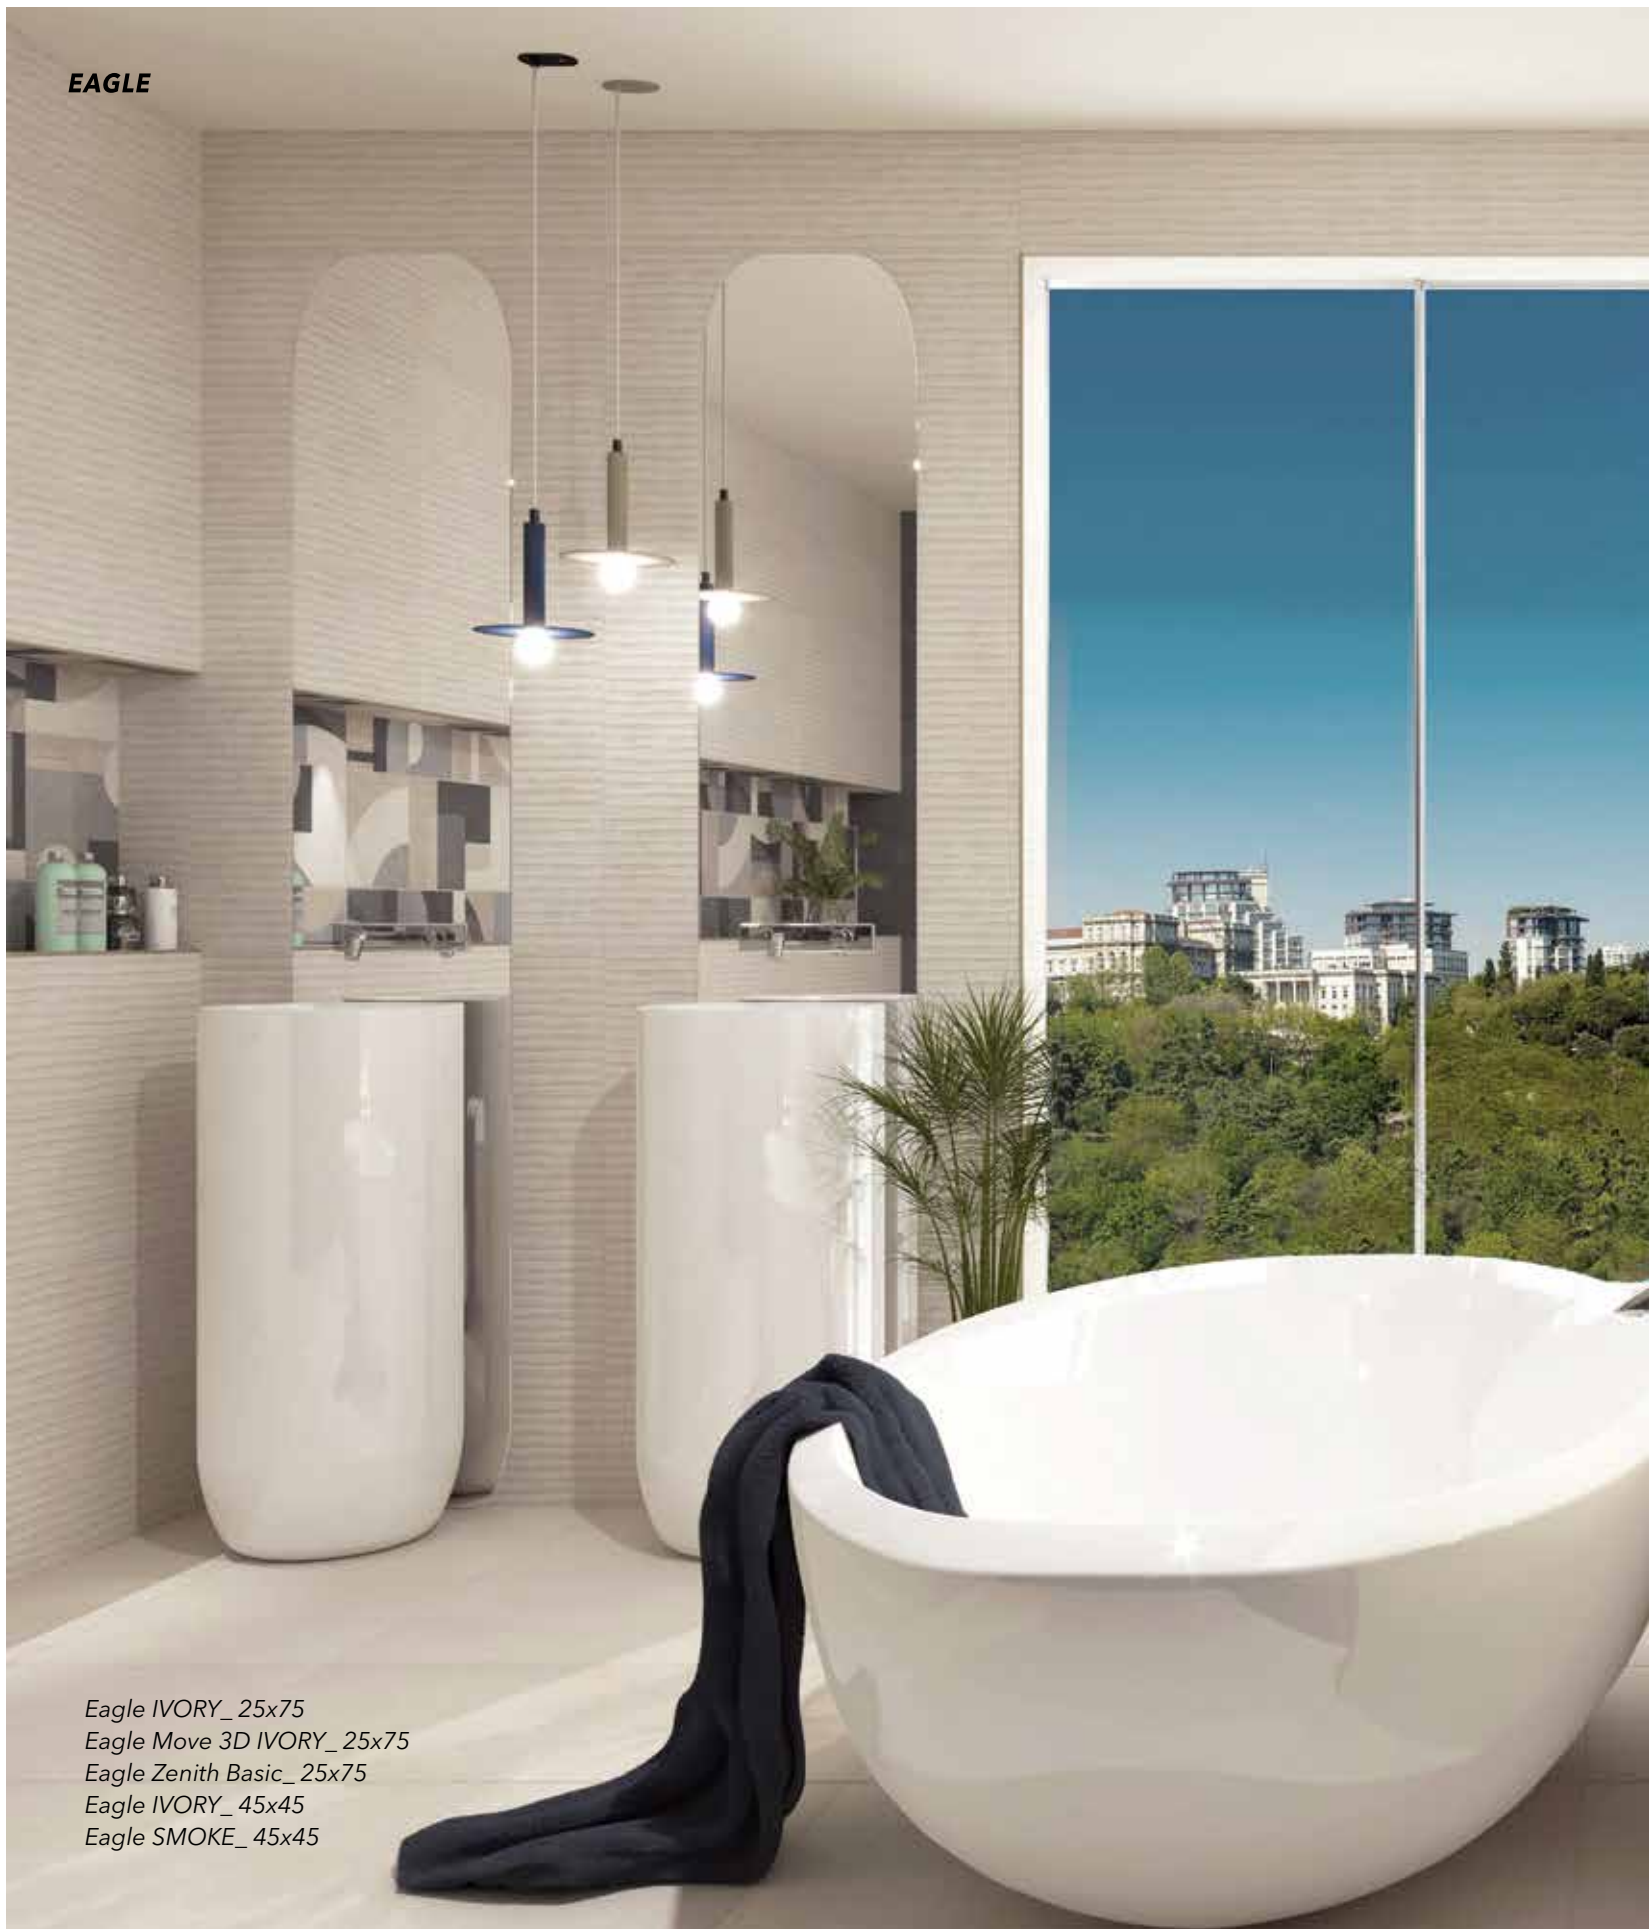

*Eagle IVORY_ 25x75
Eagle Move 3D IVORY_ 25x75
Eagle Zenith Basic_ 25x75
Eagle IVORY_ 45x45
Eagle SMOKE_ 45x45*



10



EAGLE IVORY 25x75 cm / WT

10



EAGLE BEIGE 25x75 cm / WT








10



EAGLE SMOKE 25x75 cm / WT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of lenght

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA/ SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
25x75	0,1875	7	1,312	20,51	62,976	1010,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 25x75	0,1875	7	1,312	20,51	62,976	1010,00	FT FLOOR TILES / PODNE PLOČICE M ²
45x45	0,2025	8	1,620	29,40	71,280	1325,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



8

EAGLE ZENITH BASIC 25x75 cm / WT



10

EAGLE MOVE 3D IVORY 25x75 cm / WT



DIN 51097 DIN 51130



PEI 4

8

EAGLE IVORY 45x45 cm / FT



PEI 3

8

EAGLE SMOKE 45x45 cm / FT



*Imperial PRIME_25x75
Imperial BLUE_25x75*

Raskošna grafika tamnog mermera odlikuje novu seriju Imperial. Teget boja u kombinaciji sa belim šarama daje prelep kontrast koji doprinosi efektu luksuza. Savršena je za uklapanje sa stilskim elementima nameštaja.

Luxurious dark marble graphics feature the new Imperial series. The navy blue color in combination with the white patterns gives a beautiful contrast that contributes to the effect of luxury. It is perfect for fitting with stylish furniture elements.

IMPERIAL

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES



25x75
9,2mm


45x45
8,2mm


KERAMIKA
KANJIZA

IMPERIAL



Imperial PRIME_ 25x75
Imperial LIGHT_ 25x75
Imperial BLUE_45x45

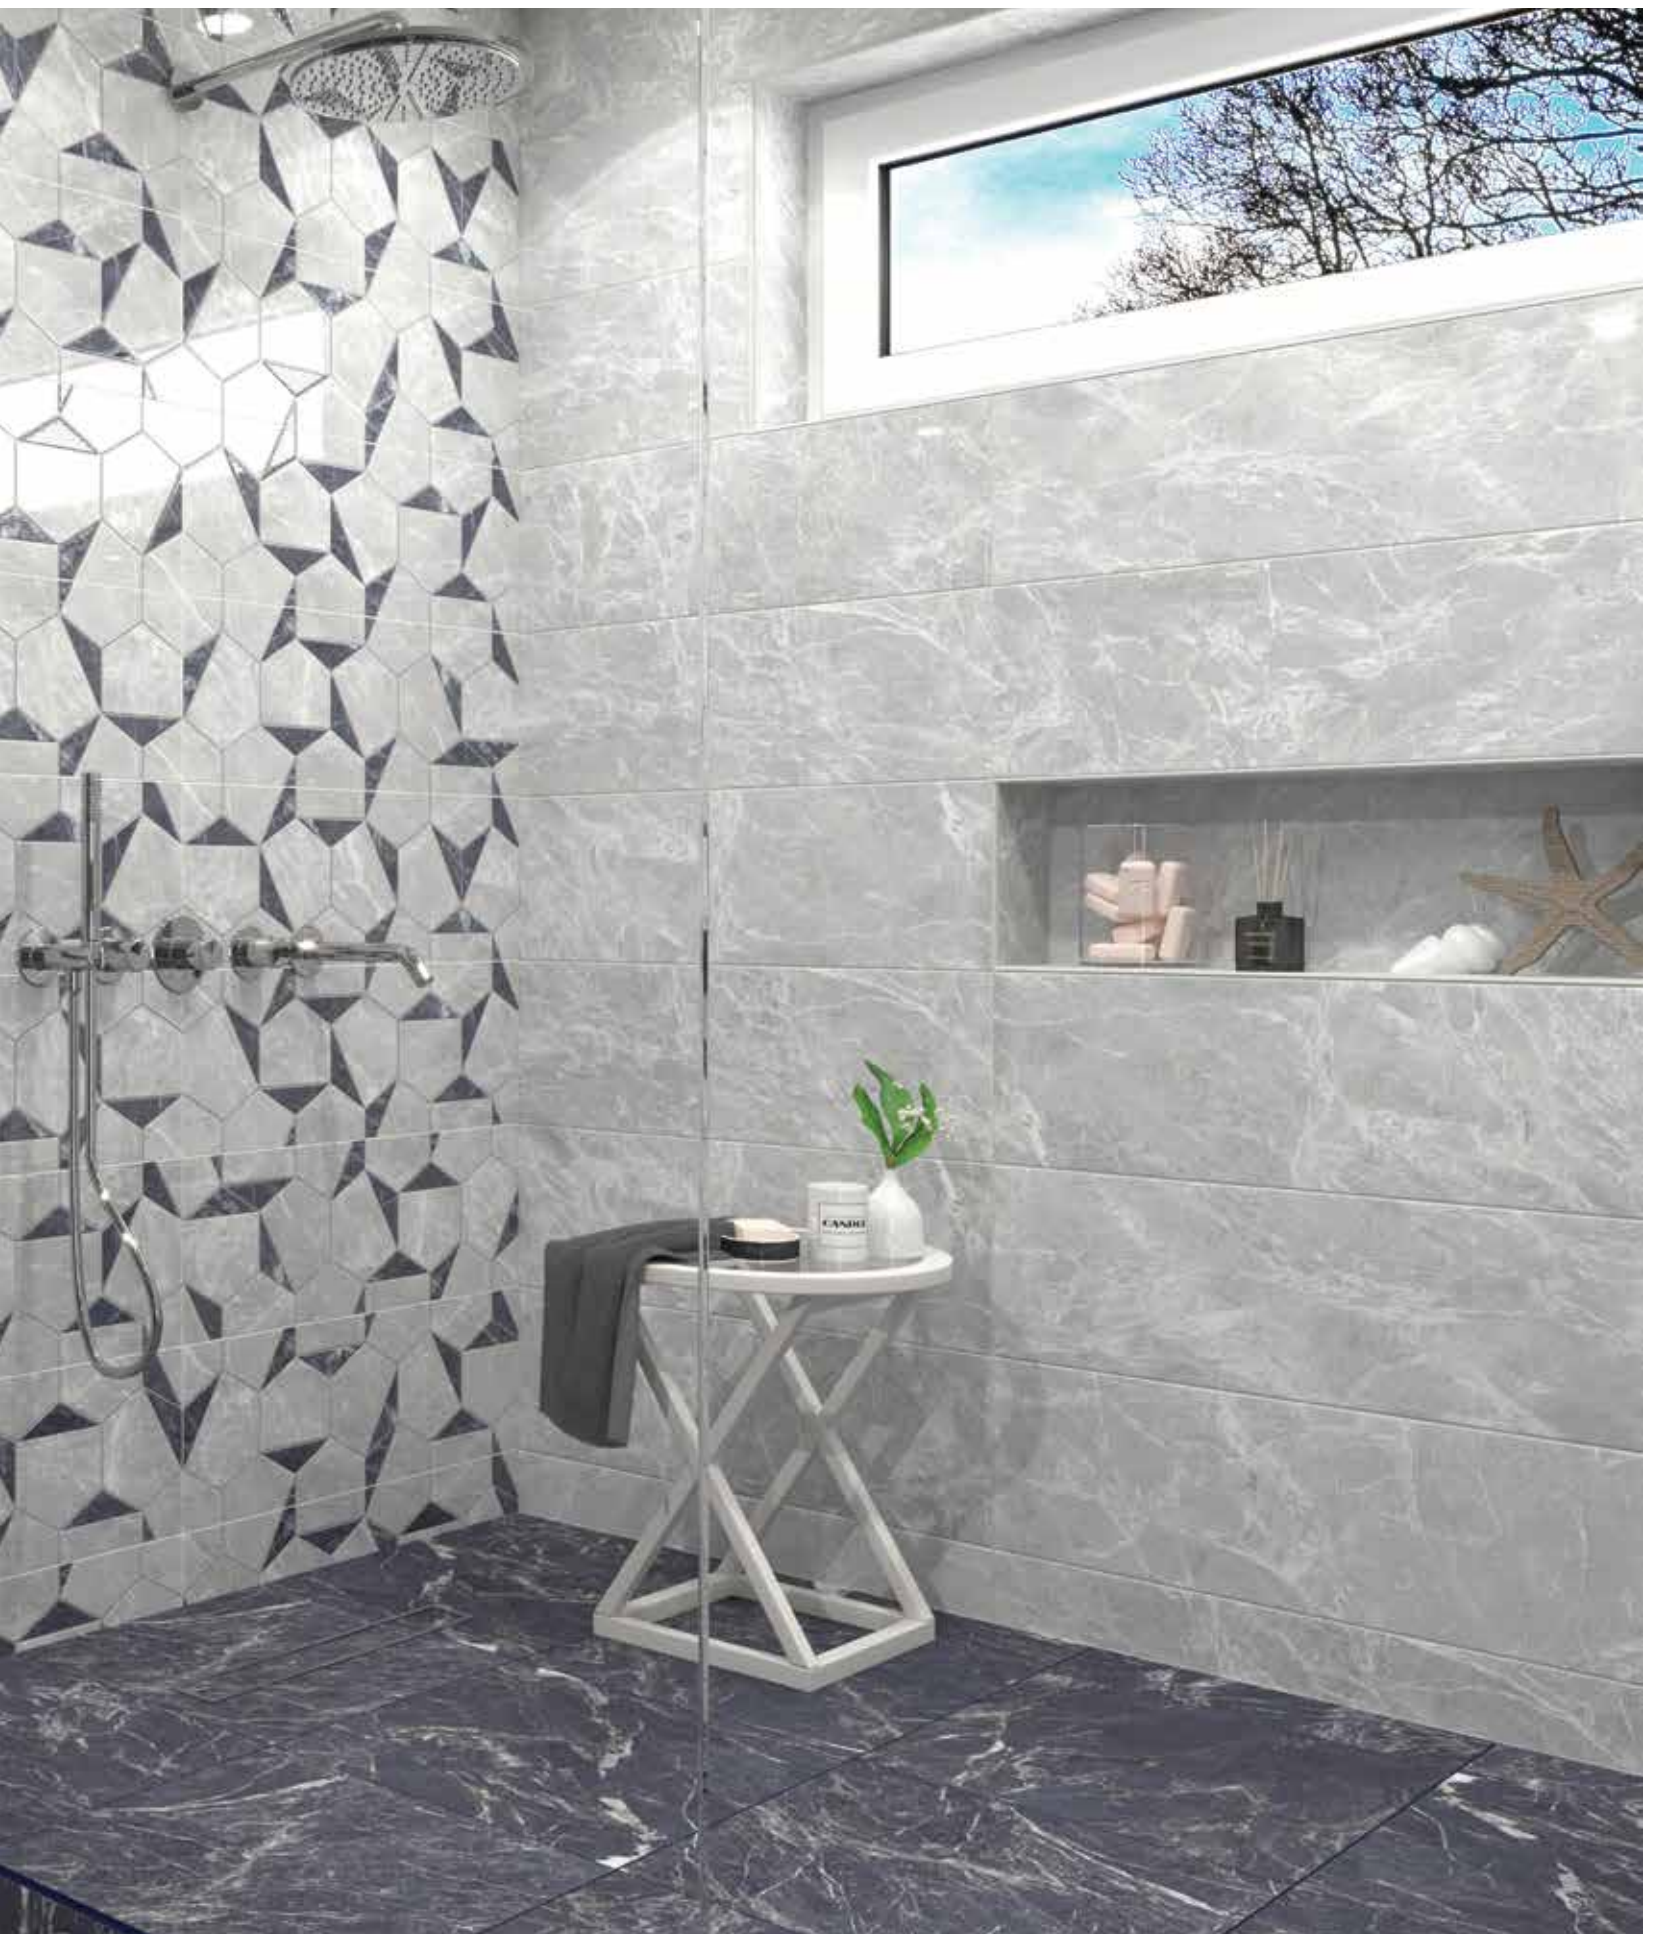

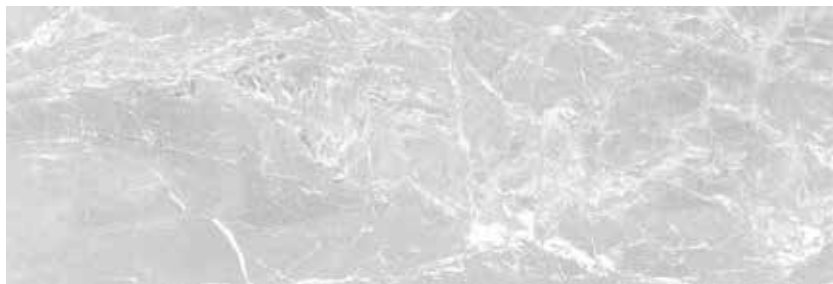

12

IMPERIAL LIGHT 25x75 cm / WT



12

IMPERIAL BLUE 25x75 cm / WT



6

IMPERIAL PRIME 25x75 cm / WT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length



DIN 51097 DIN 51130



PEI
1

8

IMPERIAL BLUE 45x45 cm / FT

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
25x75	0,1875	7	1,312	20,51	62,976	1010,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 25x75	0,1875	7	1,312	20,51	62,976	1010,00	FT FLOOR TILES / PODNE PLOČICE M ²
45x45	0,2025	8	1,620	29,40	71,280	1325,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE



Snow_ 25x75
Snow Mosaic 3D_ 25x75

Snežno bela pločica, savršena za uklapanje uz svaki stil opremanja enterijera. Serija ima i reljefni dekor imitacije mozaika, koji daje razigranost ovoj jednostavnoj seriji.

Snow white tile, perfect for fitting into any style of interior design. The series also has a relief mosaic imitation decor, which gives playfulness to this simple series.


KERAMIKA
KANJIZA




25x75
9,2mm

SNOW

ZIDNE PLOČICE
WALL TILES

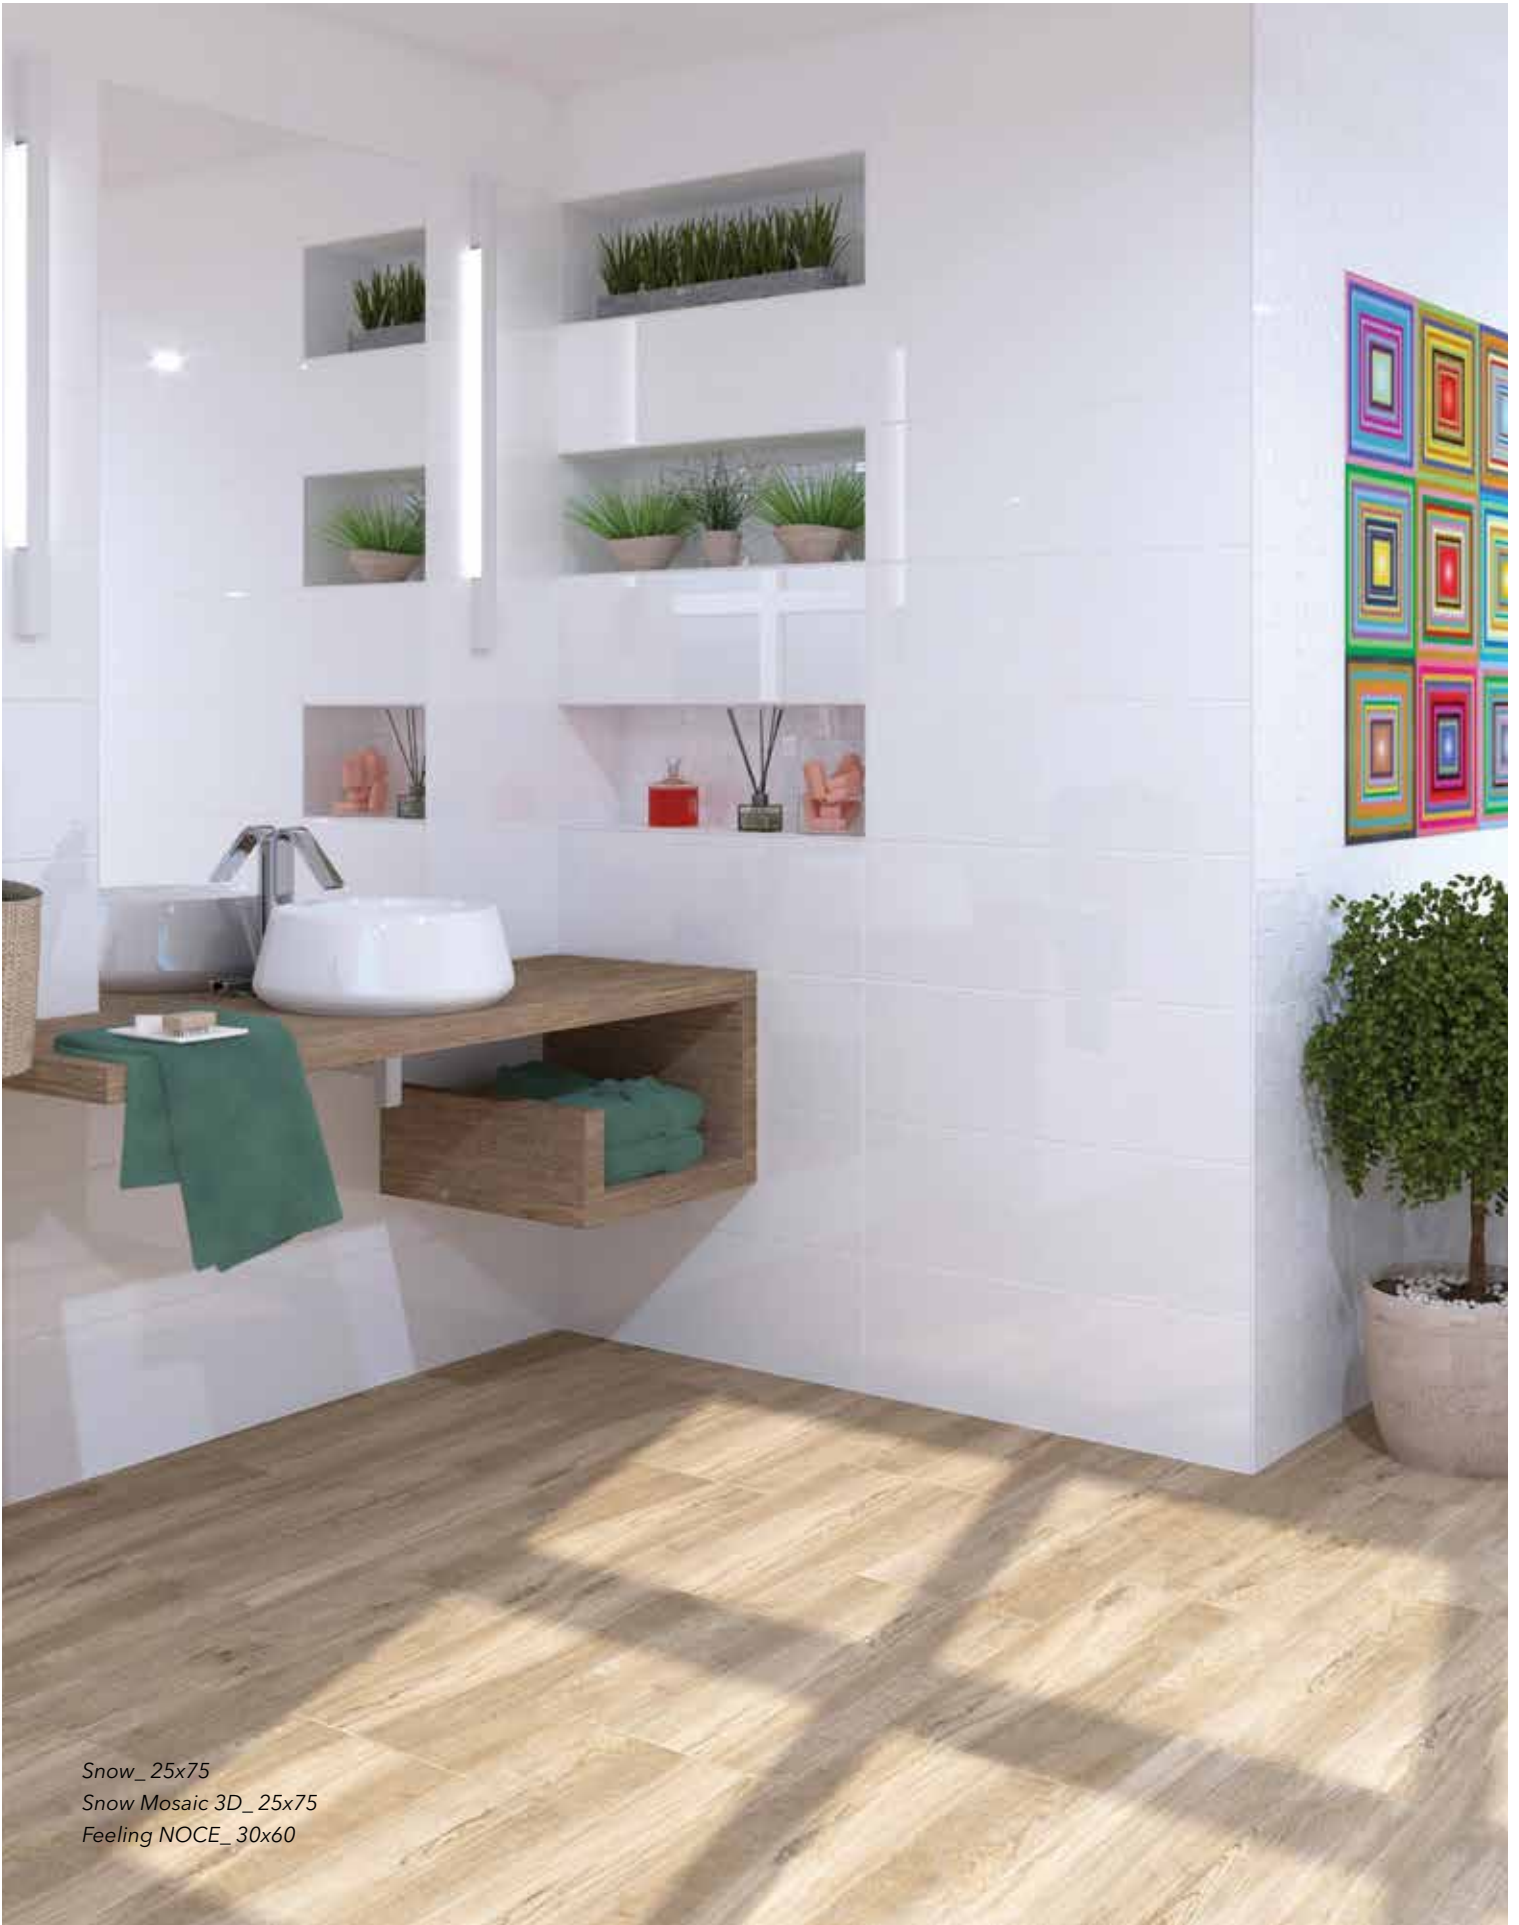

Snow_25x75
Snow Mosaic 3D_25x75
Feeling NOCE_30x60

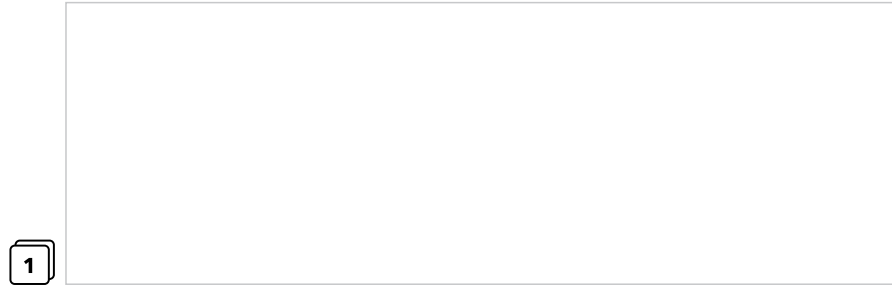

1

SNOW 25x75 cm / WT



1

SNOW MOSAIC 3D 25x75 cm / WT

SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:



CEMENT 29,5x59, 59x59 rett cm - na strani / see page 24








LUXOR 59x59 rett cm - na strani / see page 14

FEELING 30x60 cm - na strani / see page 49

SPACE 59x59 cm rett - na strani / see page 20



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
25x75	0,1875	7	1,312	20,51	62,976	1010,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 25x75	0,1875	7	1,312	20,51	62,976	1010,00	FT FLOOR TILES / PODNE PLOČICE M ²
							RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Luxor BLACK_25x75

Luxor WHITE_25x75

Luxor_59x59 RETT

Mermer kao večita inspiracija za opremanje enterijera. Seriju Luxor čine detalji mermera sa modernim i upadljivim venama. Odličan je izbor za postizanje efekta raskoši i vanvremenske elegancije.

Marble as an eternal inspiration for interior design. The Luxor series consists of a details of marble with modern and striking veins. It is an excellent choice for achieving the effect of luxury and timeless elegance.



25x75
9,2mm

59x59 RETT
9mm

LUXOR

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES



Luxor WHITE_25x75
Luxor BLACK_25x75
Luxor_59x59 RETT

8



LUXOR WHITE 25x75 cm / WT

10




LUXOR BLACK 25x75 cm / WT

6



LUXOR MOSAIC 3D WHITE 25x75 cm / WT

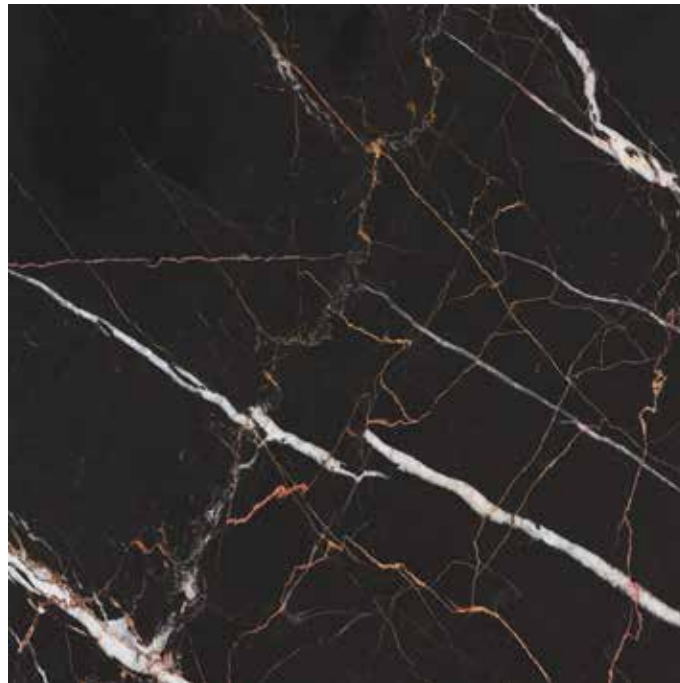

PEI
2

6

LUXOR 59x59 cm RETT / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
25x75	0,1875	7	1,312	20,51	62,976	1010,00	FT FLOOR TILES / PODNE PLOČICE M ²
DECOR 25x75	0,1875	7	1,312	20,51	62,976	1010,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

KERAMIKA
KANJIZA



30x60
8,8mm

NOVO
NEW

59x59 RETT
9mm

APOLON

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES



Apolon DARK_30x60
Apolon LIGHT_30x60

Veoma raskošan i jak dekor ove serije čini je pravom divom prostora u kojem se nalazi. Zbog svojih bogatih i upečatljivih detalja odlično se slaže uz moderan stil opremanja, uz nameštaj i sanitarije jednostavnih linija a boje koje se odlično uklapaju su crna, bela ili srebrna.

The very luxurious and strong decor of this series makes it a true diva of the space in which it is located. Due to its rich and impressive details, it goes well with modern furnishing style, furniture and sanitary ware with simple lines, and the colors that go well with it are black, white or silver.



Apolon DARK_ 30x60
Apolon Deco_ 30x60
Apolon LIGHT_ 30x60
Apolon DARK_ 59x59 RETT

9



APOLON LIGHT 30x60 cm / WT

8



APOLON DARK 30x60 cm / WT


8



APOLON DECO 30x60 cm / WT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of lenght



NOVO
NEW

DIN 51097 DIN 51130



PEI
4

5

APOLON DARK 59x59 cm RETT / FT

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
30x60	0,1800	6	1,080	16,35	51,840	810,00	FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Marvel GOLD_ 30x60
Marvel HEXAGON_ 30x60

Ova savršena reprodukcija mermera bogate, luksuzne grafike i detalja iziskuje jednako trendy i upečatljive detalje, nameštaj i sanitarije. Mi kažemo da je zidna pločica Marvel savršena za uklapanje uz romantični francuski stil opremanja, sa detaljima rose gold ili kalasične zlatne boje.

This perfect marble reproduction of rich, luxurious graphics and details calls for equally trendy and striking details, furniture and sanitary ware. We say the Marvel wall tile is perfect for a romantic French furnishing style, with details in rose gold or classic gold.




30x60
8,8mm

NOVO
NEW

45x45
8,2mm

MARVEL

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES

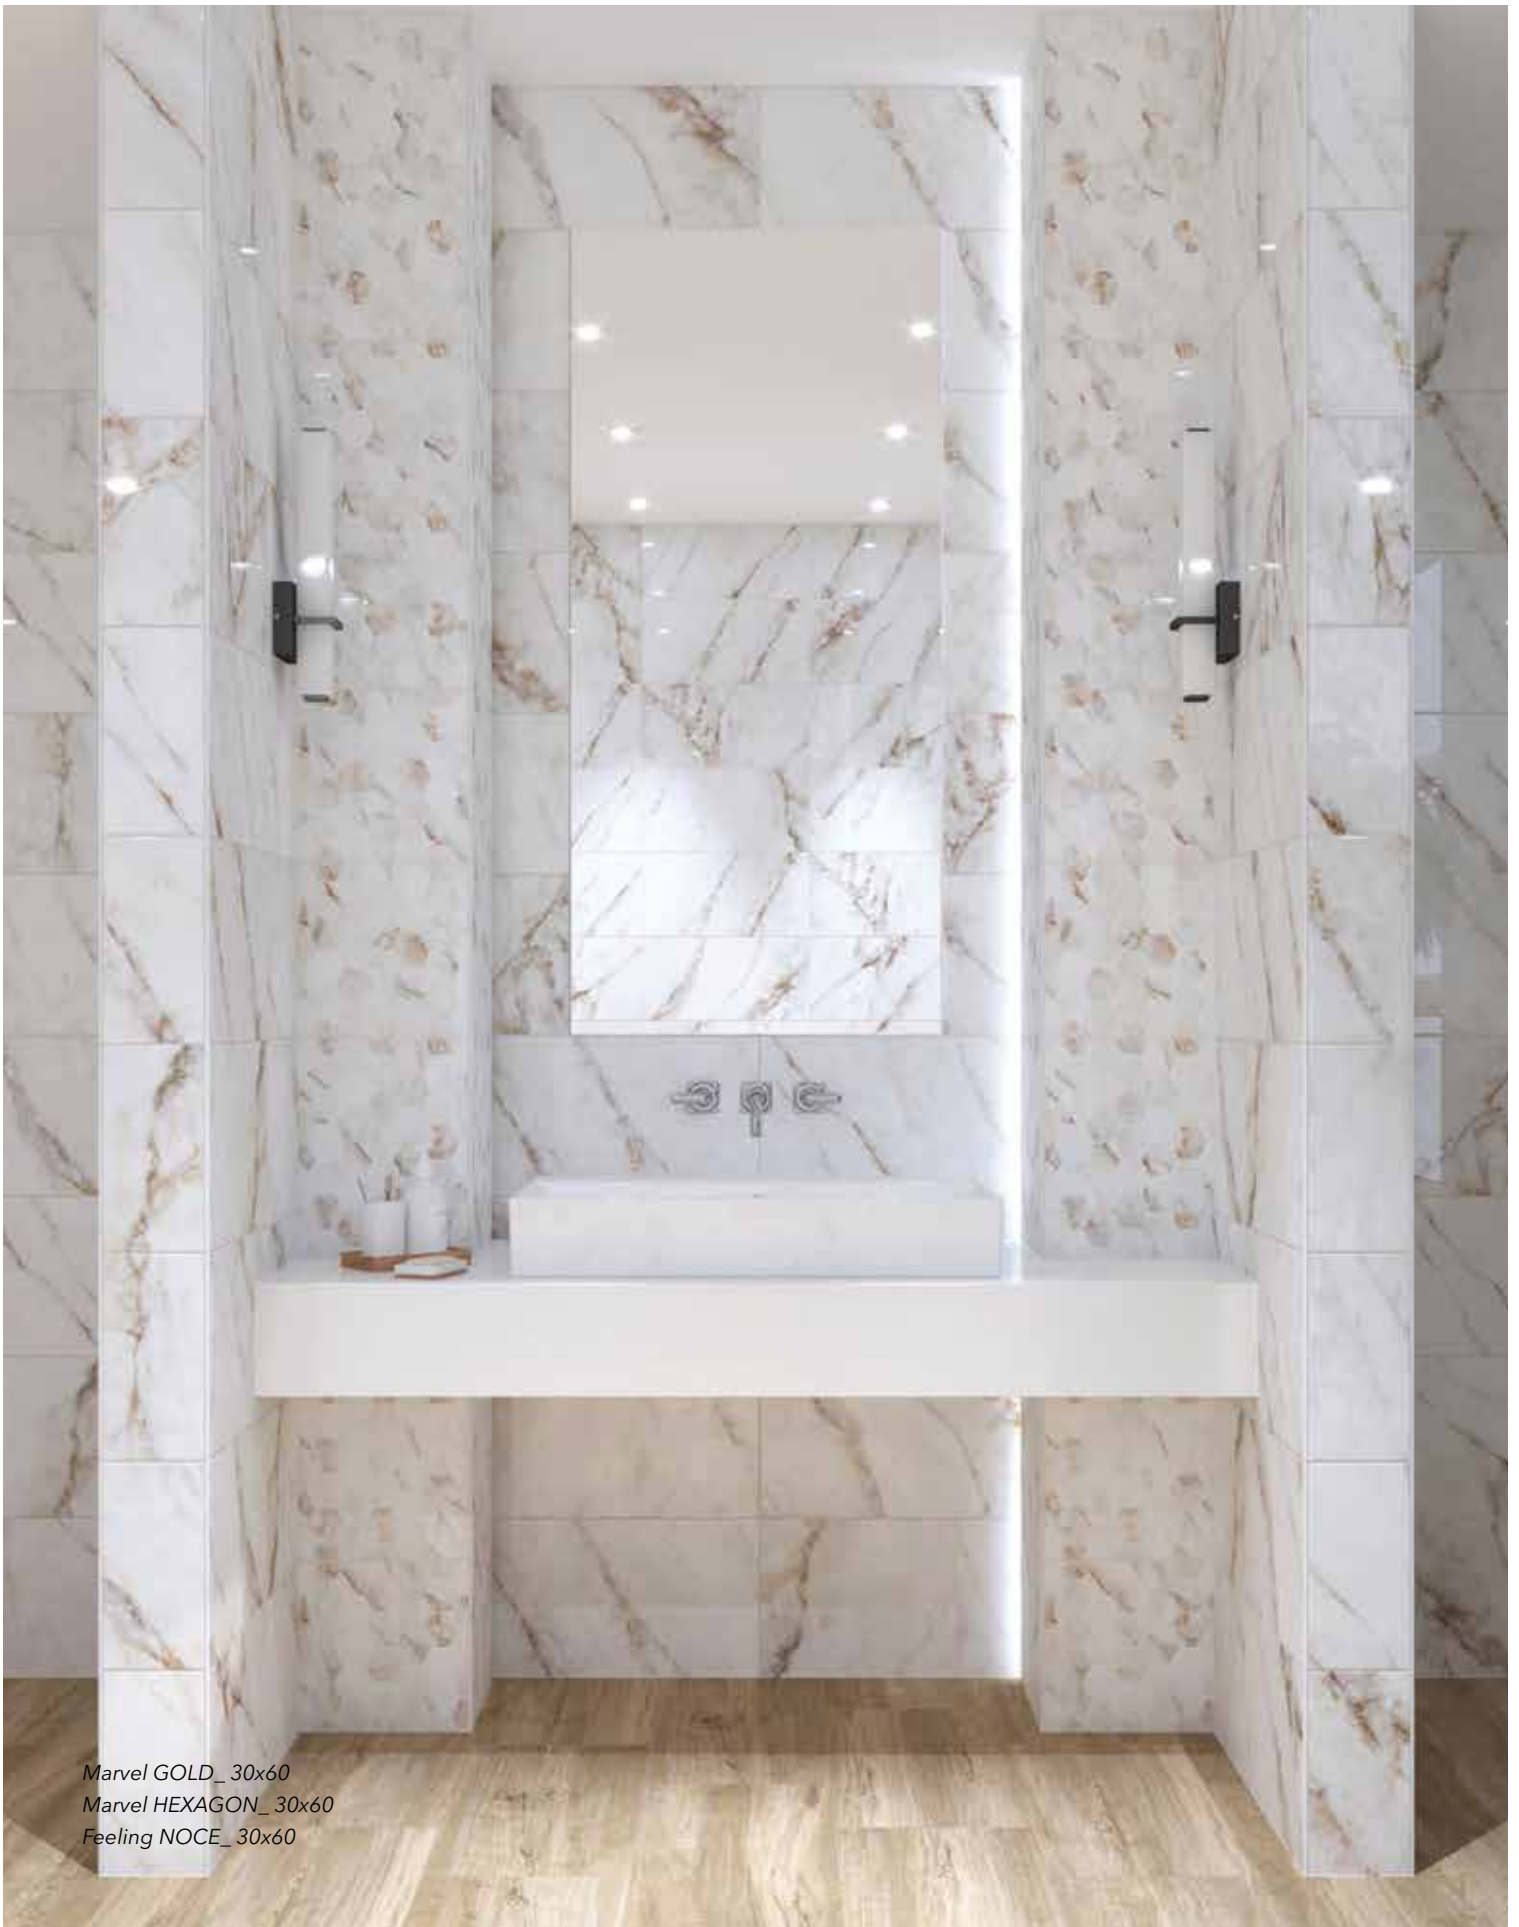

Marvel GOLD_ 30x60
Marvel HEXAGON_ 30x60
Feeling NOCE_ 30x60



8

MARVEL GOLD 30x60 cm / WT



8

MARVEL HEXAGON 30x60 cm / WT

SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:



FEELING 30x60 cm - na strani / see page 49



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
30x60	0,1800	6	1,080	16,35	51,840	810,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 30x60	0,1800	6	1,080	16,35	51,840	810,00	FT FLOOR TILES / PODNE PLOČICE M ²
45x45	0,2025	8	1,620	29,40	71,280	1325,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Marmo Bianco Mat_ 30x60

Serija Marmo je nežna i svedena reprodukcija kamena, svetle boje. I ako je grafika bogata, odlikuju je veoma nežni i mirni tonovi zbog čega se ova serija može uklapati uz više različitih stilova opremanja. Kombinacija belih elemenata i drvenih detalja istaćiće svu lepotu ove serije bilo da su linije nameštaja retro ili moderne.

The Marmo series is a gentle and reduced reproduction of light-colored stone. And if the graphics are rich, they are characterized by very gentle and calm tones, which is why this series can fit in with many different styles of furnishing. The combination of white elements and wooden details will highlight all the beauty of this series, whether the furniture lines are retro or modern.



30x60
8,8mm

NOVO
NEW

MARMO BIANCO MAT

ZIDNE PLOČICE
WALL TILES




8

MARMO BIANCO MAT 30x60 cm / WT



6

MARMO BIANCO DECO MAT 30x60 cm / WT



1

BIANCA MAT 30x60 cm / WT



SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:

MARMO BIANCO 59x59 cm rett - na strani / see page 17



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
30x60	0,1800	6	1,080	16,35	51,840	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

KERAMIKA
KANJIZA



30x60
8,8mm

NOVO
NEW

JUPITER

ZIDNE PLOČICE
WALL TILES

Zemljani tonovi osnovnih boja pločice uz veoma vernu grafiku prirodnog kamena čini seriju Jupiter vanvremen-skom lepoticom koja nikada neće izaći iz mode. Bele sanitarije i drveni detalji savršeno se uklapaju uz ovu seriju, a mi predlažemo jednostavne, elegantne linije koje će dozvoliti lepoti pločica da dođe do izražaja.

The earthy tones of the basic colors of the tile with the very faithful graphics of natural stone make the Jupiter series a timeless beauty that will never go out of style. White sanitary ware and wooden details fit perfectly with this series, and we suggest simple, elegant lines that will allow the beauty of the tiles to come to the point.

*Jupiter ICE_30x60
Feeling NOCE_30x60*





Jupiter BEIGE_30x60



8

JUPITER BEIGE 30x60 cm / WT



8

JUPITER ICE 30x60 cm / WT



6

FEELING DECO 30x60 cm / WT



*Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length*



DIN 51097 DIN 51130



PEI 4

8

JUPITER R ICE 59x59 cm **RETT** / FT



PEI 4

8

JUPITER R BEIGE 59x59 cm **RETT** / FT



PEI 3

8

JUPITER R DARK 59x59 cm **RETT** / FT

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
30x60	0,1800	6	1,080	16,35	51,840	810,00	FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE



Space BEIGE_ 30x60

Suptilna grafika i pažljiv odabir boja za pločice serije Space čine je veoma lakom za uklapanje uz najrazličitije stilove dizajna enterijera. Mi predlažemo malo smelije elemente i detalje, koji će učiniti savršen balans naspram jednostavnosti dekora ove prelepe serije.

Subtle graphics and careful color selection for the tiles of the Space series make it very easy to fit in with the most diverse styles of interior design. We propose slightly bolder elements and details, which will make a perfect balance against the simplicity of the decor of this beautiful series.

SPACE

ZIDNE PLOČICE
WALL TILES



30x60
8,8mm


NOVO
NEW

KERAMIKA
KANJIZA




Space LIGHT GREY_ 30x60
Space TITAN_ 59x59 RETT

8

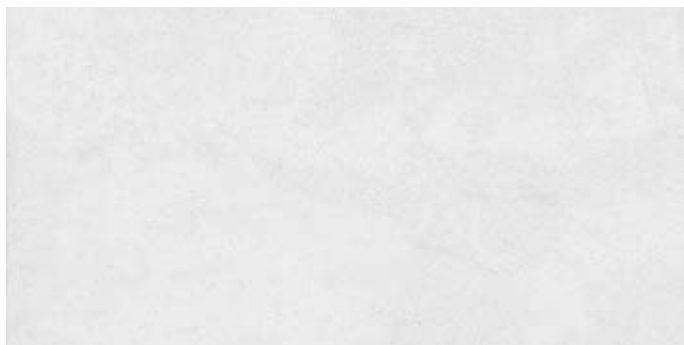

SPACE LIGHT GREY 30x60 cm / WT

8

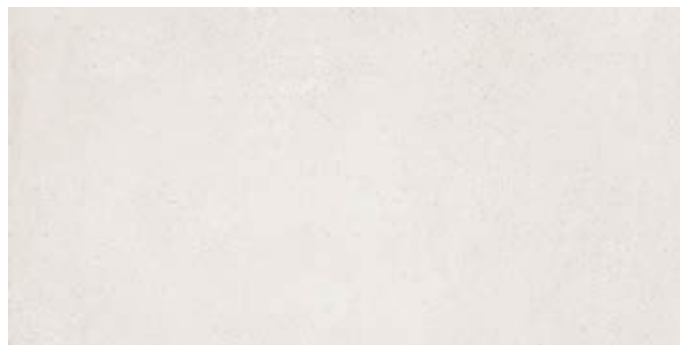

SPACE BEIGE 30x60 cm / WT

6




FEELING DECO 30x60 cm / WT




Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNJENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
30x60	0,1800	6	1,080	16,35	51,840	810,00	FT FLOOR TILES / PODNE PLOČICE M ²
59x59	0,3481	4	1,392	26,02	41,760	810,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

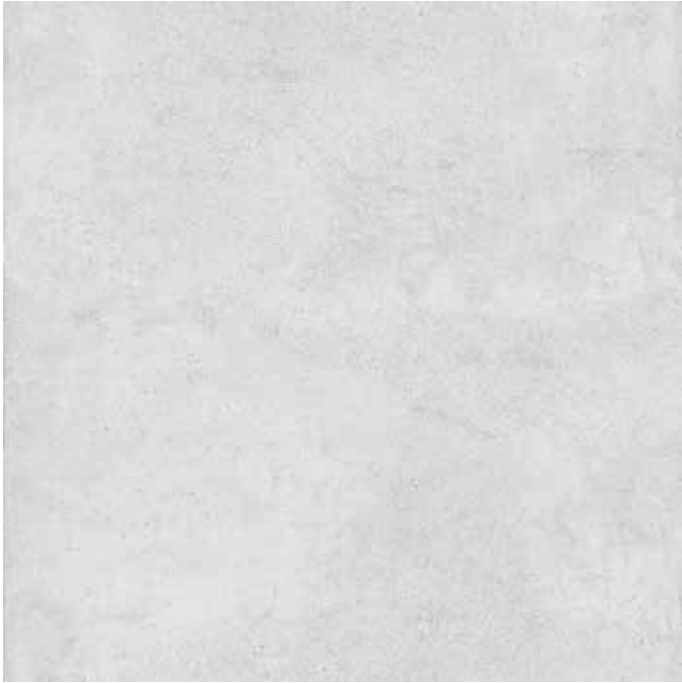

PEI 4
8

SPACE LIGHT GREY RETT 59x59 cm / FT

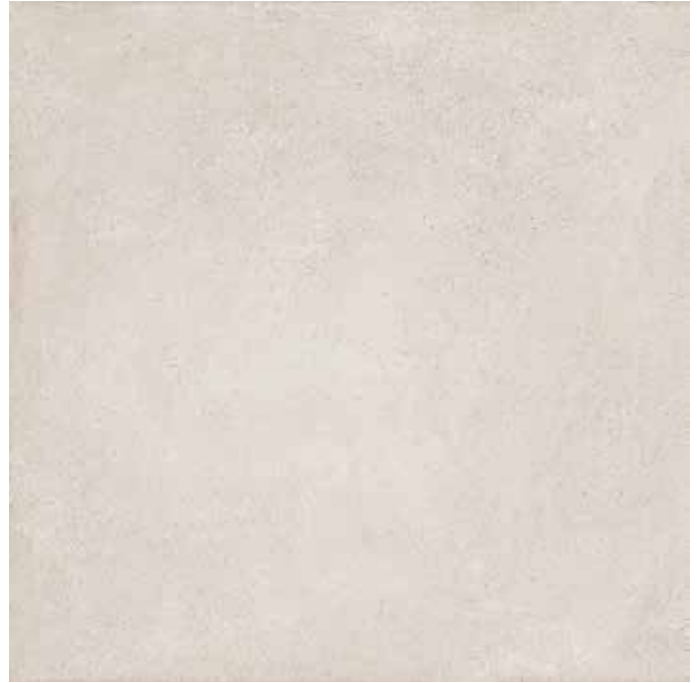

PEI 3
8

SPACE BEIGE RETT 59x59 cm / FT



PEI 4
8

SPACE TITAN RETT 59x59 cm / FT

KERAMIKA
KANJIZA



30x60
8,8mm

SMART

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES



Smart POWDER_20x60
Smart Deco POWDER_20x60

Elegancija i nežnost sinonim su za seriju zidnih pločica Smart. Osnovni dekor betona daje joj dozu jednostavnosti, dok pažljivo odabrane nežne boje i dekorirani omogućavaju da postignete efekat topline u vašem kupatilu.








Elegance and tenderness are synonymous for Smart wall tile series. The basic decor of concrete gives it a dose of simplicity, while carefully selected gentle colors and decors allow you to achieve the effect of warmth in your bathroom.




Smart CREMA_ 20x60
 Smart SAND_ 20x60
 Smart Deco POWDER_ 20x60
 Smart CREMA_ 45x45



Preporučena fuga / Recommended grout 3 mm
 Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
							FT FLOOR TILES / PODNE PLOČICE M ²
20x60	0,1200	13	1,560	22,49	68,640	1015,00	LI LISTELA KOM / PC
DECOR 20x60	0,1200	13	1,560	22,49	68,640	1015,00	IN 32INSERT KOM / PC
45x45	0,2025	8	1,620	29,40	71,280	1325,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE



18

SMART CREMA 20x60 cm / WT



18

SMART POWDER 20x60 cm / WT



18

SMART SAND 20x60 cm / WT



8

SMART DECO POWDER 20x60 cm / WT



DIN 51097 DIN 51130



PEI 4

12

SMART CREMA 45x45 cm / FT

KERAMIKA
KANJIZA



20x60
9mm

JOY

ZIDNE PLOČICE
WALL TILES


Prelepe bele pločice visokog sjaja i pune boje čine seriju Joy. Osim klasične bele, serija sadrži i dve reljefne pločice - jednu sa igrom mozaika, a drugu sa nežnim reljefom latica. Upravo ovi reljefi seriji Joy daju dozu razdraganosti, a sve zidne serije iz ove pločice idealno se uklapaju uz Keramika Kanjiža podne pločice sa reprodukcijom drveta.

Beautiful white tiles with a high gloss and full color make the Joy series. In addition to the classic white, the series also includes two relief tiles - one with a game of mosaic, and the other with a gentle relief of petals. It is these reliefs that give the Joy series a touch of cheerfulness, and all the wall tiles from this series fit perfectly with Keramika Kanjiža floor tiles with wood reproduction.

Joy Petals 3D WHITE_20x60



1



JOY WHITE 20x60 cm / WT



JOY MOSAIC 3D WHITE 20x60 cm / WT

1



JOY PETALS 3D WHITE 20x60 cm / WT

1

SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:



CEMENT 29,5x59, 59x59 rett cm - na strani / see page 24








LUXOR 59x59 rett cm - na strani / see page 14

FEELING 30x60 cm - na strani / see page 49

SPACE 59x59 cm rett - na strani / see page 20



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNJENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
20x60	0,1200	13	1,560	22,49	68,640	1015,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 20x60	0,1200	13	1,560	22,49	68,640	1015,00	FT FLOOR TILES / PODNE PLOČICE M ²
							RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Mercury BEIGE_25x50
Mercury CRAFT_25x50
Mercury GREY_25x50

Savršena imitacija betona čini seriju Mercury. Tri osnovne boje kao i raskošan dekor pačvorka omogućava savršen spoj sa potpuno različitim stilovima opremanja enterijera - od rustike, preko minimalizma do industrijskog dizajna.

The perfect imitation of concrete makes the Mercury series. The three basic colors as well as the sumptuous decor of the patchwork allows a perfect blend of this series with completely different styles of interior design from rustic, through minimalism to industrial design.

KERAMIKA
KANJIŽA



25x50
8,8mm

33x33
7,3mm

MERCURY

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES



Mercury GREY_ 25x50
Mercury CRAFT_ 25x50
Mercury ICE_ 33x33



12



MERCURY ICE 25x50 cm / WT

12



MERCURY GREY 25x50 cm / WT

12



MERCURY BEIGE 25x50 cm / WT

6



MERCURY CRAFT 25x50 cm / WT



DIN 51097 DIN 51130

PEI 4

12



MERCURY ICE 33x33 cm / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
25x50	0,1250	10	1,250	18,05	60,000	895,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 25x50	0,1250	10	1,250	18,05	60,000	895,00	FT FLOOR TILES / PODNE PLOČICE M ²
33x33	0,1089	16	1,742	27,04	73,164	1165,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Kingstone ICE_ 25x50
Kingstone Onda 3D ICE_ 25x50
Kingstone GREY_ 45x45

Raskošna serija zidnih pločica sa dekorom kamena. Realno reprodukovani detalji, vene i boje daju ovoj seriji luksuzan izgled.

Luxurious series of wall tiles with stone decor. Realistically reproduced details, veins and colors give this series a luxurious look.




25x50
8,8mm

45x45
8,2mm

KINGSTONE

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES

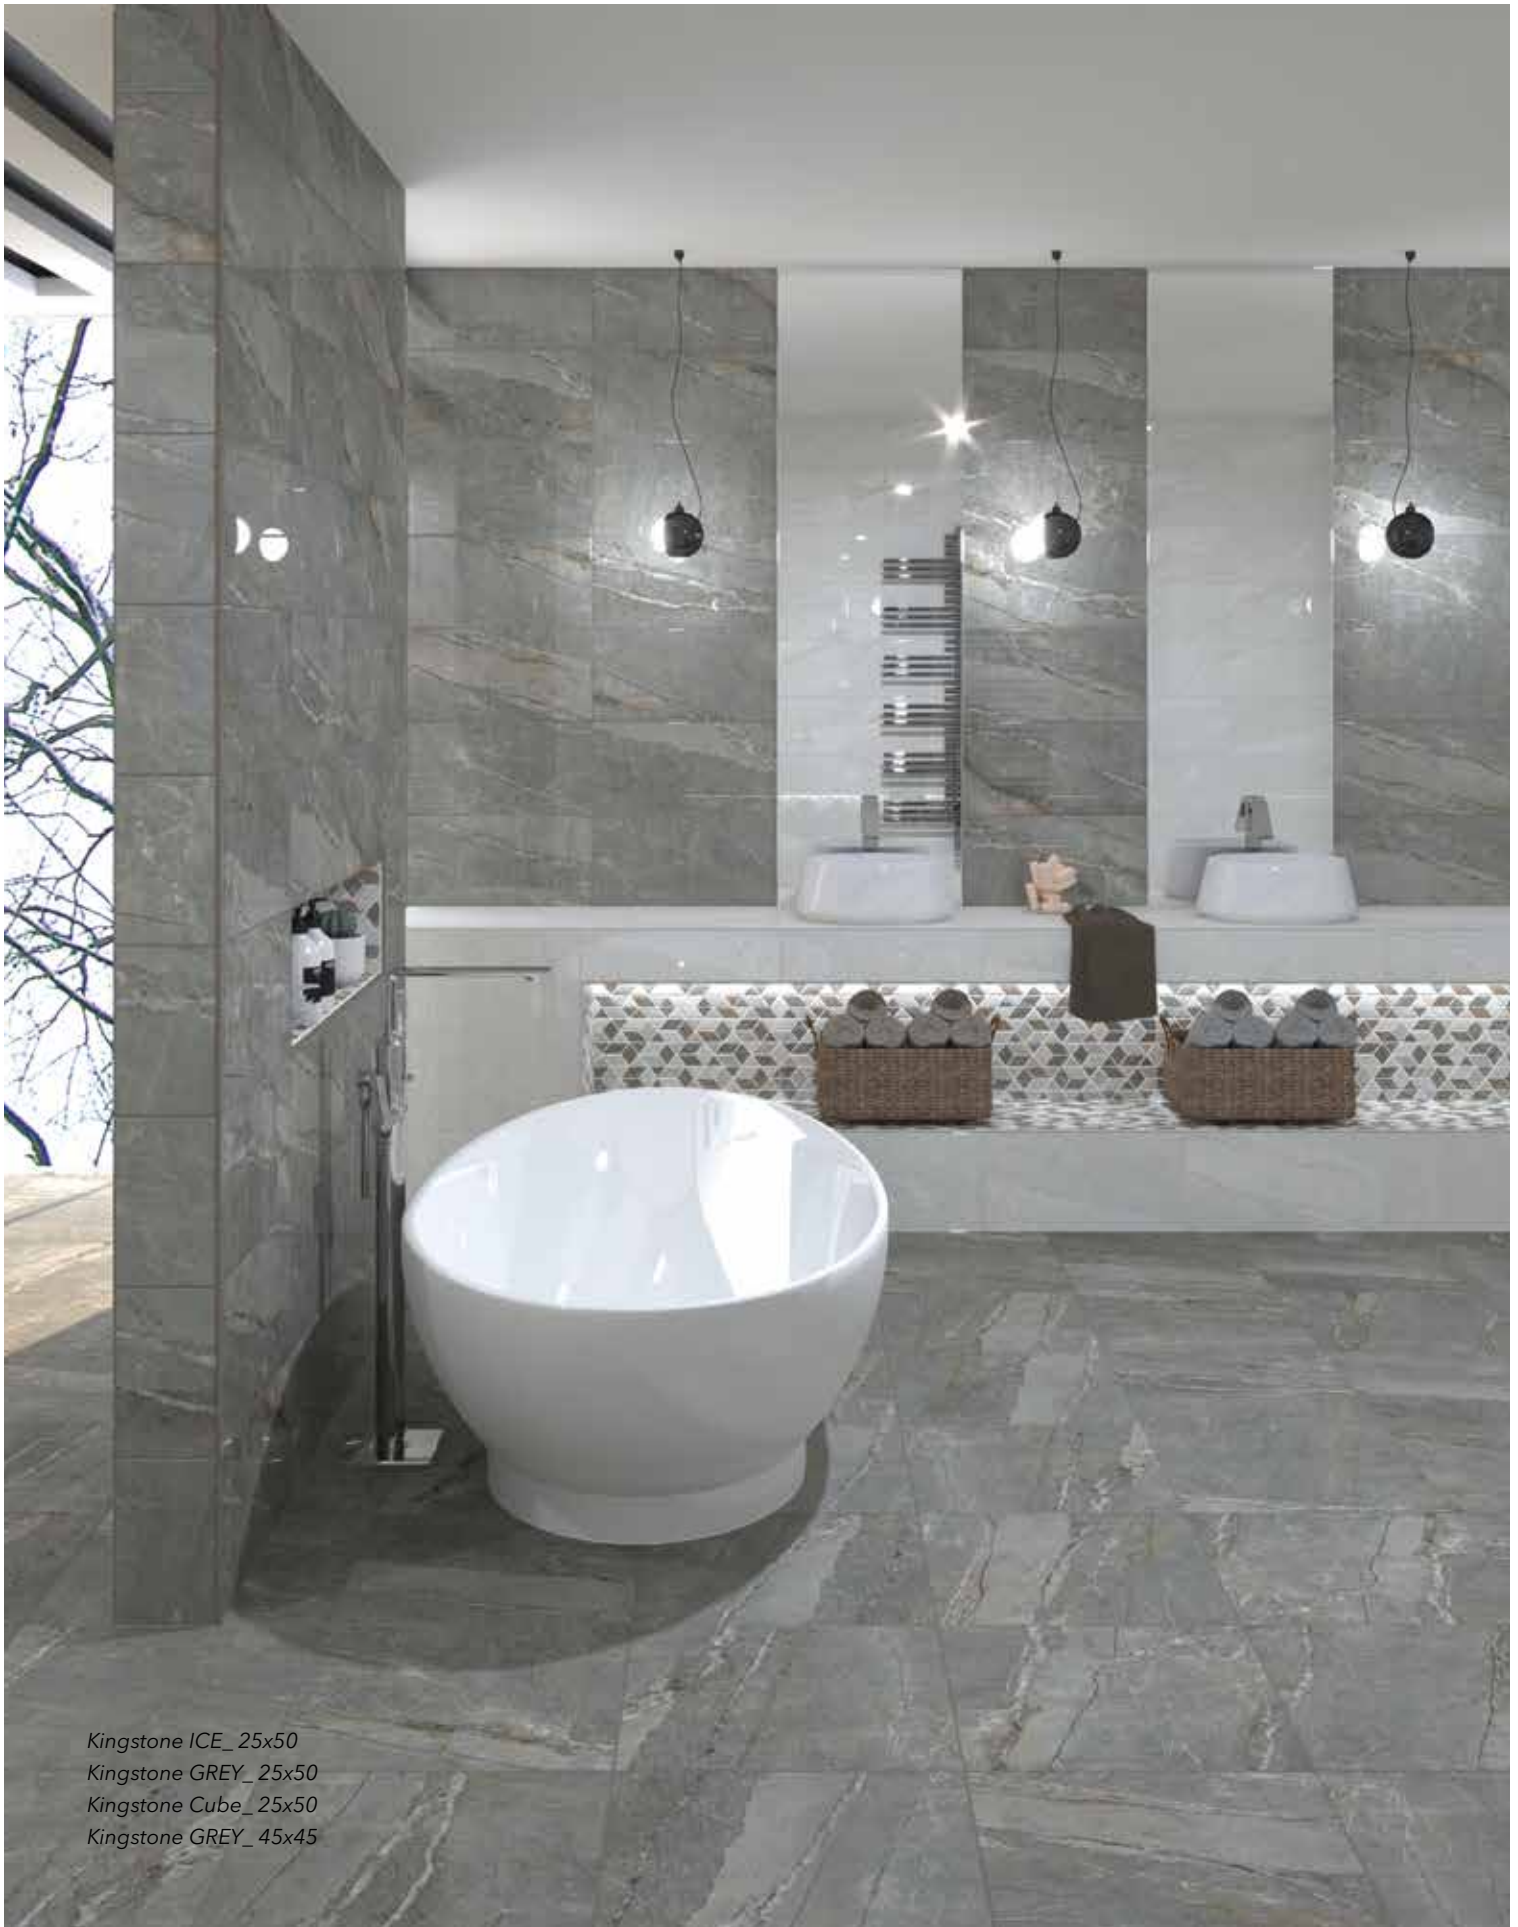

Kingstone ICE_ 25x50
Kingstone GREY_ 25x50
Kingstone Cube_ 25x50
Kingstone GREY_ 45x45



11

KINGSTONE ICE 25x50 cm / WT



11

KINGSTONE ONDA 3D ICE 25x50 cm / WT



11

KINGSTONE GREY 25x50 cm / WT



6

KINGSTONE CUBE 25x50 cm / WT



DIN 51097 DIN 51130



PEI 3

9

KINGSTONE GREY 45x45 cm / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
25x50	0,1250	10	1,250	18,05	60,000	895,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 25x50	0,1250	10	1,250	18,05	60,000	895,00	FT FLOOR TILES / PODNE PLOČICE M ²
45x45	0,2025	8	1,620	29,40	71,280	1325,00	RETT REKTIKOVANA PLOČICA / RECTIFIED TILE



Carrara_25x50

Carrara Mosaic 3D_25x50

Beli mermer kao klasika koja nikad ne izlazi iz mode preneti je na seriju Carrara. Nežna ali moćna, pružiće vašem prostoru efekat raskošii moderan izgled.

White marble as a classic that never goes out of fashion has been transferred to the Carrara series. Gentle but powerful, it will give your space the effect of luxury and a modern look.

KERAMIKA
KANJIŽA



25x50
8,8mm

45x45
8,2mm

CARRARA

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES



Carrara_25x50
Carrara Onda 3D_25x50
Carrara_45x45



CARRARA 25x50 cm / WT



CARRARA MOSAIC 3D 25x50 cm / WT



CARRARA ONDA 3D 25x50 cm / WT



DIN 51097 DIN 51130



CARRARA 45X45 cm / FT



Preporučena fuga / Recommended grout 3 mm
Preklapanje max. 30% dužine / Overlap max. 30% of lenght

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
25x50	0,1250	10	1,250	18,05	60,000	895,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 25x50	0,1250	10	1,250	18,05	60,000	895,00	FT FLOOR TILES / PODNE PLOČICE M ²
45x45	0,2025	8	1,620	29,40	71,280	1325,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE



Habitat ICE_ 25x50

Habitat GRAPHITE_ 25x50

Habitat Stripes_ 25x50

Habitat GREY_ 33x33

Već godinama best seller među pločicama Keramika Kanjiža je serija Habitat. Zbog svoje jednostavnosti i savršeno odabranih boja ona je omiljeni izbor kako za projekte tako i za ličnu upotrebu kupaca.

For years, the best seller among Keramika Kanjiža tiles has been the Habitat series. Due to its simplicity and perfectly chosen colors, it is a favorite choice for both projects and personal use of customers.

KERAMIKA
KANJIŽA



25x50
8,8mm

33x33
7,3mm

HABITAT

ZIDNE I PODNE PLOČICE
WALL AND FLOOR TILES





Habitat GREY_ 25x50
 Habitat GRAPHITE_ 25x50
 Waves ICE_ 25x50
 Habitat GREY_ 33x33




Preporučena fuga / Recommended grout 3 mm
 Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNJENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
25x50	0,1250	10	1,250	18,05	60,000	895,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 25x50	0,1250	10	1,250	18,05	60,000	895,00	FT FLOOR TILES / PODNE PLOČICE M ²
33x33	0,1089	16	1,742	27,04	73,164	1165,00	RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

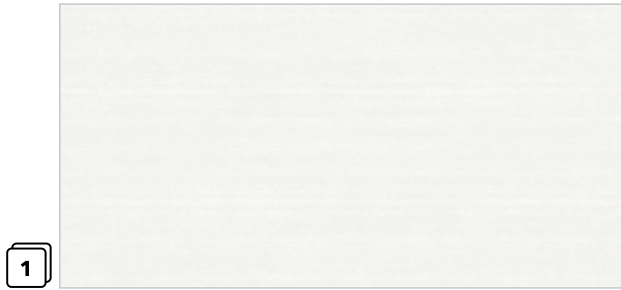

1

HABITAT ICE 25x50 cm / WT

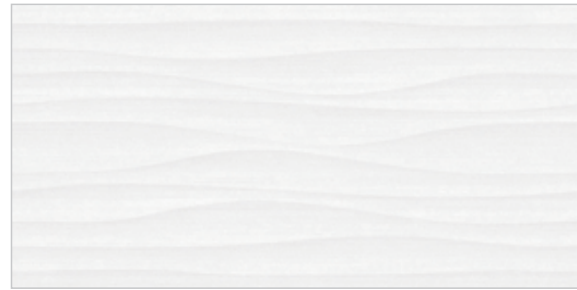

1

HABITAT ICE ONDA 3D 25x50 cm / WT



1

HABITAT GREY 25x50 cm / WT



1

HABITAT GRAPHITE 25x50 cm / WT



1

WAVES ICE 25x50 cm / WT



1

HABITAT STRIPES 25x50 cm / WT



DIN 51097 DIN 51130



PEI 3

1

HABITAT GREY 33x33 cm / FT



PEI 2

1

HABITAT GRAPHITE 33x33 cm / FT



Bianca_25x50
Bianca Onda 3D_25x50
Cement LIMESTONE_59x59 RETT

Klasika koja nikada ne izlazi iz mode jednostavna bela pločica obogaćena živopisnim dekorima i dekorima sa reljefom. Pravi je izbor za ljubitelje klasike i „country“ stila opremanja.

A classic that never goes out of fashion a simple white tile enriched with colorful decors and decors with relief. It is the right choice for fans of classics and "country" style of furnishing.


BIANCA

ZIDNE PLOČICE
WALL TILES




25x50
8,8mm


KERAMIKA
KANJIŽA

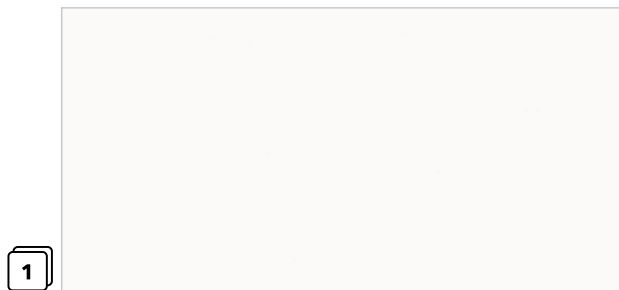

BIANCA 25x50 cm / WT

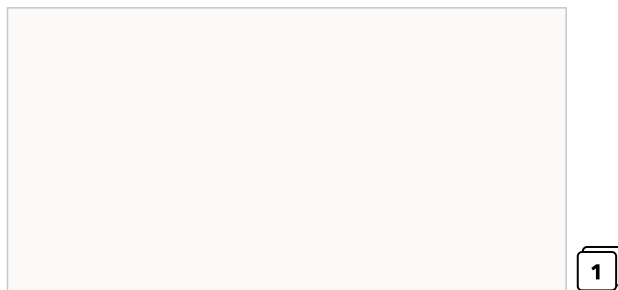

BIANCA MAT 25x50 cm / WT

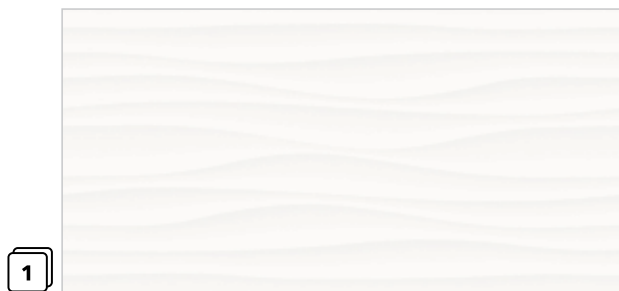

BIANCA ONDA 3D 25x50 cm / WT

SAVRŠENO SE SLAŽU SA PODNIM PLOČICAMA / THEIR PERFECT MATCH AMONG FLOOR TILES:



CEMENT 29,5x59, 59x59 rett cm - na strani / see page 24

LUXOR 59x59 rett cm - na strani / see page 14

FEELING 30x60 cm rett - na strani / see page 49

SPACE 59x59 cm rett - na strani / see page 20



Preporučena fuga / Recommended grout 3 mm

Preklapanje max. 30% dužine / Overlap max. 30% of length

FORMAT	M ² KOM/PC	KOM/PC	M ²	KG	M ² /PAL	KG/PAL	OBJAŠNENJE SIMBOLA SYMBOL EXPLANATION
							WT WALL TILES / ZIDNE PLOČICE M ²
25x50	0,1250	10	1,250	18,05	60,000	895,00	WT WALL TILES / ZIDNE PLOČICE / DECOR M ²
DECOR 25x50	0,1250	10	1,250	18,05	60,000	895,00	FT FLOOR TILES / PODNE PLOČICE M ²
							RETT REKTIFIKOVANA PLOČICA / RECTIFIED TILE

*TEHNIČKE
KARAKTERISTIKE
TECHNICAL
CHARACTERISTICS*

TEHNIČKE KARAKTERISTIKE

„Keramika Kanjiža“ doo iz Kanjiže proizvodi suvo presovane, jednom žarene podne i zidne keramičke pločice (takozvanu monokoturu i monoporožu) kao i ukrasnu galanteriju. Podne pločice su otporne na mraz, pogodne su za postavljanje spolja. Naše keramičke pločice u svim segmentima ispunjavaju zahteve harmonizovanog evropskog standarda SRPS EN 14411.

STANDARDI

Od decembra 2005. godine primenjuje se standard SRPS EN 14411, objavljen uz dozvolu Evropskog komiteta za standardizaciju CEN. Ovaj standard je identičan međunarodnom standardu EN 14411, koji je obavezan za primenu u svim zemljama članicama Evropske Unije. CE znak je simbol usaglašenosti proizvoda, proizvedenog u skladu sa harmonizovanim standardom koji ispunjava bitne zahteve direktive za građevinske proizvode.

Keramičke pločice razvrstavaju se na klase kvaliteta 1, 2 i 3 ispitane sledećim standardima:

SRPS EN 14411 Keramičke pločice – Definicije, klasifikacija, karakteristike, vrednovanje usaglašenosti i označavanje - Definiše termine klasifikacije, karakteristike, vrednovanje usaglašenosti i zahteve za označavanje keramičkih pločica klase kvaliteta 1.

SRPS B.D1.330 Keramičke pločice - Klasifikacija, karakteristike, ocenjivanje i verifikacija stalnosti performansi i označavanje - Definiše klasifikaciju, karakteristike, vrednovanje usaglašenosti i zahteve za označavanje keramičkih pločica klase kvaliteta 2 i 3.

Keramičke pločice razvrstavaju se prema načinu oblikovanja na:

- Keramičke pločice proizvedene vučenjem, Metoda A,
- Keramičke pločice proizvedene suvim presovanjem, Metoda B

Keramičke pločice razvrstavaju se prema upijanju vode na:

- Grupa Ia ako je upijanje vode manje od 0,5%
- Grupa Ib ako je upijanje vode od 0,5 do 3%
- Grupa IIa ako je upijanje vode od 3 do 6%
- Grupa IIb ako je upijanje vode od 6 do 10%
- Grupa III ako je upijanje vode preko 10%

Podela prema prirodi vidne površine:

- Glazirane (GL)
- Neglazirane (UGL)

Asortiman proizvoda Keramika Kanjiža razvrstava se na:

- Podne pločice Grupa B Ia Prilog G
- Zidne pločice Grupa B III Prilog K

Metode ispitivanja korišćene za određivanje karakteristika proizvoda su opisane u standardima SRPS ISO 10545.

SRPS ISO 10545-1 Uzimanje uzoraka i osnove za prihvatanje – Ovaj standard utvrđuje broj uzoraka koje treba proveriti iz partije i maksimalni broj dozvoljenih grešaka.

SRPS ISO 10545-2 Određivanje mera i kvaliteta vidne površine – Ovim standardom utvrđuje se metoda za određivanje mernih karakteristika (dužina, širina, debljina, pravost stranica, odstupanje od pravog ugla, ravnost površine) i kvalitet površine keramičkih pločica.

SRPS ISO 10545-3 Određivanje upijanja vode, prividne poroznosti, prividne relativne zapreminske mase i zapreminske mase – Ovim ispitivanjem se utvrđuje metoda za određivanje upijanja vode i prividne poroznosti keramičkih pločica.

SRPS ISO 10545-4 Određivanje modula loma pri savijanju i čvrstoće pri lomu – Utvrđuje metodu ispitivanja za određivanje čvrstoće pri lomu. Dobijeni podatak ukazuje na opterećenje koju pločica može podneti.

SRPS ISO 10545-7 Određivanje otpornosti glaziranih pločica prema površinskom habanju – PEI klasifikacija – Ocenjuje otpornost glazure prema površinskom habanju. Postupak se vrši rotiranjem sredstva za habanje i ocenjivanjem delovanja habanja, vizuelnim poređenjem pločica izloženih habanju i pločica koje nisu bile izložene habanju. Ocenjivanje proizvoda se vrši od 0 do 5, u zavisnosti od broja obrtaja rotirajućeg sredstva i pojave oštećenja (5 je najviša klasa otpornosti glaziranih pločica prema površinskom habanju).

PEI - klasifikacija glaziranih podnih pločica u odnosu na njihovu otpornost prema habanju.

PEI 0 Glazirane pločice u ovoj klasi ne preporučuju se za korišćenje na podovima.

PEI 1 Prikladno za pokrivanje podnih površina u kojima se hoda isključivo u obući sa mekanim đonovima ili bosonog, bez nečistoća koje grebu podnu površinu (na primer stambena kupatila i spavaće sobe bez direktnog pristupa spolja).

PEI 2 Prikladno za pokrivanje podnih površina u kojima se hoda u mekanoj ili običnoj obući sa uobičajeno malim količinama nečistoće koja grebe površinu (na primer sobe i prostori za dnevni boravak u kućama i stanovima sa izuzetkom kuhinja, ulaza i prostora u kojima je veliki promet).

PEI 3 Prikladno za pokrivanje podnih površina gde se često hoda u običnoj obući sa malo nečistoće koja grebe pod (na primer stambene kuhinje, holovi, hodnici, balkoni, terase). Ne odnosi se na izuzetnu obuću, na primer čizme okovane ekserima.

PEI 4 Prikladno za podove tamno gde se odvija uobičajen promet sa nešto više nečistoće koja grebe pod (na primer ulazi, javne kuhinje, hoteli, izložbeni i prodajni prostori).

PEI 5 Prikladno za podove sa stalnim velikim prohodnim opterećenjem i prisutnom prljavštinom koja grebe (na primer javne površine kao što su trgovački centri, unutrašnje aerodromske prostorije, hotelska predvorja i primena u industriji).

Ova klasifikacija važi za primenu pod uobičajenim uslovima.

Informacija o otpornosti podnih pločica prema habanju navedena je ispod slike podnih pločica.

SRPS ISO 10545-8 Određivanje linearnog termičkog širenja – Određuje se koeficijent linearnog termičkog širenja za opseg od sobne temperature do 100 °C. Vrednost pokazuje u kojoj meri će se postavljena pločica širiti usled temperaturnih promena. Ovaj podatak treba da se uzme u obzir prilikom određivanja debljine fuge između pločica.

SRPS ISO 10545-9 Određivanje otpornosti prema temperaturnom šoku – Pločica se izlaže nagloj promeni temperature i nakon toga se proverava pojava oštećenja.

SRPS ISO 10545-10 Određivanje širenja vlaženjem – Ovim standardom se utvrđuje metoda za određivanje širenja keramičkih pločica vlaženjem. Podatak pomaže prilikom dimenzionisanja fuge između pločica.

SRPS ISO 10545-11 Određivanje otpornosti prema vlasavosti glaziranih pločica – Vršni se proverava pojava pukotina na površini glazirane pločice nakon tretiranja sa parom na pritisku od 500 kPa i temperaturi od 159 °C, dva sata u autoklavu.

SRPS ISO 10545-12 Određivanje otpornosti prema mrazu – Po ovoj metodi pločice se izlažu smrzavanju i otapanju u temperaturnom opsegu od -5 °C do +5 °C, najmanje 100 ciklusa. Ovo ispitivanje simulira ponašanje proizvoda u spoljašnjim klimatskim uslovima.

SRPS ISO 10545-13 Određivanje otpornosti prema hemikalijama – Ovim ispitivanjem se utvrđuje otpornost pločica prema dejstvu hemikalija za domaćinstvo, soli u vodi bazena za plivanje, kiselina, baza i otpornost prema dejstvu olovke HB tvrdoće. U zavisnosti od vrste hemikalija i otpornosti pločice se dele u sledeće klase:

Hemikalije za domaćinstvo i soli u vodi bazena za plivanje:

- A bez vidljivih efekata
- B male promene u izgledu ili ako pločice nisu prošle test olovke HB tvrdoće
- C značajne promene

Kiseline i baze (malih koncentracija)

- LA bez vidljivih efekata
- LB male promene u izgledu ili ako pločice nisu prošle test olovke HB tvrdoće
- LC značajne promene

Kiseline i baze (velikih koncentracija)

- HA bez vidljivih efekata
- HB male promene u izgledu ili ako pločice nisu prošle test olovke HB tvrdoće
- HC značajne promene

SRPS ISO 10545-14 Određivanje otpornosti prema stvaranju mrlja – Vidna površina pločice se dovodi u kontakt sa sredstvom za stvaranje mrlja, nakon odstranjivanja vrši se klasifikacija. Klasifikacija se vrši od 5 do 1 u zavisnosti od lakoće uklanjanja mrlje, pri čemu se kod klase 5 najlakše uklanja mrlja.

DIN 51130:2004-06 Utvrđivanje karakteristika za sprečavanje klizavosti

Za veće podne površine, industrijske i komercijalne namene poželjno je da je koeficijent trenja viši od onih koji se koristi u kućama. Nemački standard DIN 51130:2010-10 definiše postupak i služi za testiranje i klasificiranje anti kliznih svojstava podnih obloga koji su predviđeni za korišćenje u radnim prostorima i područjima gde je prisutna opasnost od klizanja. Prihvaćeni ugao se utvrđuje na podnoj oblozi premazanoj sa sredstvom za podmazivanje (ulje) a osoba koja sprovodi kontrolu sa kontrolnim cipelama kreće se napred - nazad po kontrolisanoj podnoj oblozi koja se počinje naginjati od horizontalnog stanja i nagib raste do prihvaćenog ugla tj. ugla pri kom kontrolor dostiže granicu sigurnog hodanja. Prihvaćeni ugao služi za ocenu stepena otpornosti na klizanje

PRIHVAĆENI UGAO	KLASA OTPORNOSTI NA KLIZANJE	PREPORUČUJE SE
6° do 10°	R 9	Ulazi u kuće, dnevni boravak...
10° do 19°	R 10	Hodnici, prodavnice, radionice...
19° do 27°	R 11	Terase, balkoni...
27° do 35°	R 12	Stepeništa, gazišta u vrtu...
Preko 35°	R 13	Oblasti sa specijalnim zahtevima

DIN 51097:02.80 Utvrđivanje karakteristika za sprečavanje klizavosti

U uslovima vlažnosti, na gazištima podnih obloga koje se koriste u kupatilu, svlačionicama, sanitarnim čvorovima i sličnim prostorijama, ocenjuju se karakteristike podnih obloga po ovom standardu.

tokom izvođenja postupka kontinuirano i jednolično se nanosi tečnost na test podnu oblogu koja se počinje naginjati od horizontalnog stanja i nagib raste do prihvaćenog ugla tj. ugla pri kom kontrolor dostiže granicu sigurnog hodanja. Osoba koja sprovodi kontrolu kreće se napred - nazad po kontrolisanoj podnoj oblozi bosih nogu. U zavisnosti od postignutog ugla nagiba test obloge se mogu svrstati u sledeće grupe:

SREDNJA VREDNOST NAGIBA UGLA	KLASA OTPORNOSTI NA KLIZANJE	PREPORUČUJE SE
≥ 12°	A	Kupatila
≥ 18°	B	Svlačionice, sanitarni čvor...
≥ 24°	C	Oblasti sa specijalnim zahtevima

Informacija o otpornosti podnih pločica prema klizanju navedena je pored slike podnih pločica, a odnosi se samo na one pločice koje zadovoljavaju klasu otpornosti na klizanje (na ulje ili vodu).

SRPS U.F2.011 Završni radovi u građevinarstvu – Izvođenje keramičarskih radova – Standard utvrđuje postupak za oblaganje zidova, podova keramičkim pločicama u unutrašnjosti objekta i spolja.

PREPORUKE PRILIKOM UGRADNJE

- Pre ugradnje zidne pločice treba potopiti u vodu radi boljeg prijanjanja za podlogu.
- Shodno standardu SRPS U.F2.011 pločice obavezno postaviti sa fugom. Minimalna fuga za zidne i podne pločice je 3 mm.
- Podloga za postavljanje pločica treba da bude suva (ne sveže malterisana) i bez strukturnih pukotina.
- Prilikom kupovine pločica obavezno obratiti pažnju na oznaku kalibra i nijanse. U jednoj prostoriji postavljati isključivo pločice iste oznake kalibra i nijanse.
- Za digitalan način dekoracije pločica karakterističan je veći broj lica različitog izgleda. Pre postavljanja pločica preporučljivo je slaganje nekoliko m².
- Ukoliko se pločice postavljaju „na smicanje“, preporučuje se smicanje na maksimalno 30% dužine.
- Reklamacije na ugrađene pločice se ne prihvataju, osim reklamacija na skrivene mane proizvoda a odnose se na trajnost pločica po standardu SRPS EN 14411.

GRES PODNE PLOČICE SRPS EN 14411, Grupa B Ia, Prilog G

OSOBINA	METODA ISPITIVANJA	TOLERANCIJA % / MM	
		SRPS EN 14411	KK
Dužina i širina	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Debljina	SRPS ISO 10545-2	± 5,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Odstupanje od pravog ugla	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Ravnost stranica	SRPS ISO 10545-2	± 0,5 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Ravnost površine	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	+ 0,20 % / - 0,1 % / max. (+ 1.5 / -0.5) mm
Kvalitet površine	SRPS ISO 10545-2	Min. 95% bez vidljivog oštećenja	
Upijanje vode	SRPS ISO 10545-3	≤ 0,50 %	< 0,30 %
Čvrstoća pri lomu	SRPS ISO 10545-4	Za deb. ≥ 7.5 mm 1300 N Za deb. < 7.5 mm 700 N	> 1600 N > 1100 N
Modul loma pri savijanju	SRPS ISO 10545-4	> 35 N/mm ² > 32 N/mm ²	> 40 N/mm ²
Otpornost na habanje	SRPS ISO 10545-7	Beleži se klasa habanja i broj ciklusa	Deklarisano od strane proizvođača
Koeficijent linearnog termičkog širenja	SRPS ISO 10545-8	Deklarisana vrednost	7×10 ⁻⁶ K ⁻¹
Otpornost prema temperaturnom šoku	SRPS ISO 10545-9	Zahteva se	Odgovara
Otpornost prema vlasavosti	SRPS ISO 10545-11	Zahteva se	Odgovara
Otpornost prema mrazu	SRPS ISO 10545-12	Zahteva se	Odgovara
Otpornost prema hemikalijama u domaćinstvu	SRPS ISO 10545-13	Najmanje B	A
Otpornost prema stvaranju mrlja	SRPS ISO 10545-14	Najmanje klasa 3	Klasa 5

ZIDNE PLOČICE SRPS EN 14411, Grupa B III, Prilog K

OSOBINA	METODA ISPITIVANJA	TOLERANCIJA % / MM	
		SRPS EN 14411	KK
Dužina i širina	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Debljina	SRPS ISO 10545-2	± 10,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Odstupanje od pravog ugla	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Ravnost stranica	SRPS ISO 10545-2	± 0,3 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Ravnost površine	SRPS ISO 10545-2	+ 0,5 % / - 0,3 % / max. (+ 2.0 / -1.5) mm	+ 0,25 % / - 0,1 % / max. (+ 1.5 / -0.5) mm
Kvalitet površine	SRPS ISO 10545-2	Min. 95% bez vidljivog oštećenja	
Upijanje vode	SRPS ISO 10545-3	> 10,00 %	> 15,00 %
Čvrstoća pri lomu	SRPS ISO 10545-4	Za deb. ≥ 7.5 mm 600 N Za deb. < 7.5 mm 200 N	> 600 N
Modul loma pri savijanju	SRPS ISO 10545-4	> 12 N/mm ² > 15 N/mm ²	> 15 N/mm ²
Koeficijent linearnog termičkog širenja	SRPS ISO 10545-8	Deklarisana vrednost	7×10 ⁻⁶ K ⁻¹
Otpornost prema temperaturnom šoku	SRPS ISO 10545-9	Zahteva se	Odgovara
Otpornost prema vlasavosti	SRPS ISO 10545-11	Zahteva se	Odgovara
Otpornost prema hemikalijama u domaćinstvu	SRPS ISO 10545-13	Najmanje B	A
Otpornost prema stvaranju mrlja	SRPS ISO 10545-14	Najmanja klasa 3	Klasa 5

IDENTIFIKACIJA PROIZVODA NA KUTIJAMA I NA PALETAMA

U procesu automatskog pakovanja keramičke pločice se pakuju u kartonsku ambalažu na koju industrijski štampač štampa osnovne podatke identifikacije proizvoda. Industrijski štampač štampa: datum, ime proizvoda, klasu, nijansu, kalibar proizvoda, identifikacioni kod klasera pločica, šifru i radni nalog proizvoda. Svaka paleta gotovog proizvoda sadrži bar-cod, pomoću koga se pločice identifikuju.

SPECIFIKACIJA PAKOVANJA PLOČICA I UKRASNE GALANTERIJE

⚠ | TEHNIČKE KARAKTERISTIKE SU PODLOŽNE PROMENAMA

PODNE PLOČICE GRUPA B Ia

PAKOVANJE PODNIH PLOČICA	FORMAT	DEBLJINA PLOČICA (MM)	M ² /KOM.	KOMADA PLOČICA U KUTIJI	M ² /KUT.	MASA KUTIJE (KG)	KOMADA KUT.NA PALETI	M ² /PAL.	MASA PALETE (KG)
	33 x 33	7,3	0,1089	16	1,742	27,04	42	73,164	1165,00
	45 x 45	8,2	0,2025	8	1,620	29,40	44	71,280	1325,00
	30 x 60	8,8	0,1800	6	1,080	19,29	48	51,840	960,00

⚠ | TEHNIČKE KARAKTERISTIKE SU PODLOŽNE PROMENAMA

REKTIFIKOVANE PLOČICE

PAKOVANJE PODNIH PLOČICA	FORMAT	DEBLJINA PLOČICA (MM)	M ² /KOM.	KOMADA PLOČICA U KUTIJI	M ² /KUT.	MASA KUTIJE (KG)	KOMADA KUT.NA PALETI	M ² /PAL.	MASA PALETE (KG)
	29,5 x 59	8,8	0,17405	6	1,044	19,05	48	50,112	945,00
	59 x 59	9,0	0,3481	4	1,392	26,02	30	41,760	810,00

⚠ | TEHNIČKE KARAKTERISTIKE SU PODLOŽNE PROMENAMA

ZIDNE PLOČICE GRUPE B III

PAKOVANJE ZIDNIH PLOČICA	FORMAT	DEBLJINA PLOČICA (MM)	M ² /KOM.	KOMADA PLOČICA U KUTIJI	M ² /KUT.	MASA KUTIJE (KG)	KOMADA KUT.NA PALETI	M ² /PAL.	MASA PALETE (KG)
	25 x 50	8,8	0,1250	10	1,250	18,05	48	60,000	895,00
	20 x 60	9,0	0,1200	13	1,560	22,49	44	68,640	1015,00
	30 x 60	9,0	0,1800	6	1,080	16,35	48	51,840	810,00
	25 x 75	9,2	0,1875	7	1,312	20,51	48	62,976	1010,00
	25 x 50 D	8,8	0,1250	10	1,250	18,05	48	60,000	895,00
	20 x 60 D	9,0	0,1200	13	1,560	22,49	44	68,640	1015,00
	25 x 75 D	9,2	0,1875	7	1,312	20,51	48	62,976	1010,00

TECHNICAL CHARACTERISTICS

„Keramika Kanjiža“ doo from Kanjiža produces dry pressed single fired floor and wall ceramic tiles (so-called monocuttura and monoporosa), as well as decorative accessories. The floor tiles are frost resistant, suitable for installation outside. Our ceramic tiles, in all their segments, meet the requirements of the harmonized European standard SRPS EN 14411.

STANDARDS

Since December 2005, the standard SRPS EN 14411 applies, published with the permission of the European Committee for Standardization CEN. This standard is an identical international standard EN 14411 which is compulsorily applied in all member states of the European Union. The CE-mark is a symbol of product conformity, developed in accordance with the harmonized standard that meets the important requirements of the Construction Products Directive.

Ceramic tiles are classified into quality classes 1,2,3 tested by the following standards:

SRPS EN 14411 Ceramic tiles - Definition, classification, characteristics and designation - Defines terms and determines classifications, characteristics and requirements for designation of ceramic tiles with the best commercial quality (first class).

According to the standard, the ceramic tiles are classified into groups according to the manner of production and water absorption.

SRPS B.D1.330 Ceramic tiles - Classification, characteristics, evaluation and verification of performance constancy and labeling - Defines the classification, characteristics, evaluation of conformity and requirements for marking of ceramic tiles of class 2 and 3.

Classification according to the manner of production:

- Group A Extruded ceramic tiles
- Group B Dry pressed tiles

Classification according to water absorption:

- Group Ia Water absorption less than 0,5%
- Group Ib Water absorption from 0,5 to 3%
- Group IIa Water absorption from 3 to 6%
- Group IIb Water absorption from 6 to 10%
- Group III Water absorption more than 10%

Classification according to the nature of the visible surface:

- Glazed (GL)
- Unglazed (UGL)

The products of „Keramika Kanjiža“ are divided into the following groups:

- Floor tiles Group B Ia Attachment G
- Wall tiles Group B III Attachment K

Testing methods used for determination of the product characteristics are described in the standards SRPS ISO 10545.

SRPS ISO 10545-1 Sampling and basis for acceptance - This standard determines the number of samples that should be checked from the series and a maximal number of allowed mistakes.

SRPS ISO 10545-2 Determination of dimensions and quality of visible surface - This standard establishes a method for determining the measurement characteristics (length, width, thickness, flatness of sides, deviation for a right angle, and flatness of the surface) and quality of the surface of ceramic tiles.

SRPS ISO 10545-3 Determination of water absorption, apparent porosity, apparent relative density and bulk density - This testing establishes a method for determination of water absorption and apparent porosity of ceramic tiles.

SRPS ISO 10545-4 Determination of modulus of rupture and fracture strength - Establishes a testing method for determining the fracture strength. Obtained data indicate the load that the tile can bear.

SRPS ISO 10545-7 Determination of surface abrasion resistance of glazed tiles - PEI classification - The glaze resistance to surface abrasion is being determined. The procedure is performed by rotation of assets for abrasion and assessment of the abrasion effect, by visual comparison of tiles exposed to abrasion and tiles which were not exposed to abrasion. The product assessment is performed from 0 to 5, depending on the speed of rotation tools and occurrence of damages (5 is the highest class of resistance of glazed tiles according to the surface abrasion).

PEI - classification of glazed floor tiles in relation to their abrasion resistance

PEI 0 Glazed tiles in this class are not recommended for application on floors.

PEI 1 Appropriate for covering floor surfaces where people walk only in shoes with soft soles or barefoot, without dirt which scratches the floor surface (for example, residential bathrooms and bedrooms without direct access from outside).

PEI 2 Appropriate for covering floor surfaces where people walk in soft or plain shoes, usually with small quantities of dirt which scratches the surface (for example, rooms and living rooms in houses and apartments, with the exception of the kitchen, the doorway and crowded rooms).

PEI 3 Appropriate for covering floor surfaces where people often walk in plain shoes, with little dirt which scratches the floor (for example, residential kitchens, halls, corridors, balconies, terraces). This does not refer to exceptional footwear, for example - studded boots.

PEI 4 Appropriate for floors with normal movement of people with slightly more dirt which scratches the floor (for example entrances, public kitchens, hotels, exhibition and retail space).

PEI 5 Appropriate for floors with constant great natural load and presence of dirt which scratches (for example, public surfaces such as commercial centers, airport interior rooms, hotel lobbies and application in industry).

This classification is valid for application in usual conditions.

The information about abrasive resistance of floor tiles is indicated next to the figures of floor tiles.

SRPS ISO 10545-8 Determination of linear thermal expansion – The coefficient of linear thermal expansion is being determined for a range of room temperature up to 100 °C. The value indicates the extent to which the placed tile will expand due to temperature changes. This information should be taken into consideration during the determination of fugue thickness between the tiles.

SRPS ISO 10545-9 Determination of thermal shock resistance – The tiles are exposed to abrupt temperature changes and afterwards the occurrence of damages is being checked.

SRPS ISO 10545-10 Determination of moisture expansion – This standard establishes a method for determination of moisture expansion of ceramic tiles. The data help to determine the dimension between tiles.

SRPS ISO 10545-11 Determination of crazing resistance of glazed surfaces – Occurrence of cracks on the surface of glazed tiles is performed after treating them with compressed steam at a pressure of 500 kPa and temperature of 159 °C, for two hours in an autoclave.

SRPS ISO 10545-12 Determination of frost resistance – According to this method, the tiles are exposed to freezing and thawing within a temperature range from -5 °C to +5 °C, for at least 100 cycles. This testing simulates the product behavior in external climate conditions.

SRPS ISO 10545-13 Determination of resistance to chemicals – This testing determines the tiles' resistance to the effect of household chemicals, salts in the water of a swimming-pool, acid, base and resistance to the effect of a 'pencil with HB hardness'. Depending on the type of chemicals and resistance of tiles, they are divided in the following classes:

Household chemicals and salts in the water of a swimming-pool

A with no visible effects

B small changes in the appearance or if the tiles did not pass the testing with a 'pencil with HB hardness'

C significant changes

Acids and bases (low concentrations)

LA with no visible effects

LB small changes in the appearance or if the tiles did not pass the testing with a 'pencil with HB hardness'

LC significant changes

Acids and bases (high concentrations)

HA with no visible effects

HB small changes in the appearance or if the tiles did not pass the testing with a 'pencil with HB hardness'

HC significant changes

SRPS ISO 10545-14 Determination of stain resistance – The visible surface of the tiles is exposed to contact with assets that create stains, and classification is performed after removal. The classification is performed from 5 to 1 depending on the ease of removing the stains, whereupon the stains are most easily removed at class 5.

DIN 51130:2004-06 Determination of anti-slip properties for floor tiles

For bigger floor surfaces, industrial and commercial purposes, it is desirable that the friction coefficient is higher than the one used in houses.

The German standard DIN 51130:2010-10 defines the procedure and serves for testing and classification of anti-slip properties of floor coverings which have been stipulated for use in working rooms and areas where danger of slipping exists. The accepted angle is determined on a floor coating with applied lubricated asset (oil) and the person who performs control with control shoes moves forward-backward on the floor coating which is being controlled and which starts to tilt from its horizontal state and the inclination increases up to an accepted angle, i.e. an angle when the controller reaches the boundary of safe walking. The accepted angle is used for assessment of the degree of slip resistance.

ACCEPTED ANGLE:	SLIP RESISTANCE CLASS:	RECOMMENDED IN:
6° do 10°	R 9	House entrances...
10° do 19°	R 10	Shops,workshops...
19° do 27°	R 11	Kitchens, laundry rooms...
27° do 35°	R 12	Great kitchens, dairies...
Over 35°	R 13	Areas with special requirements

DIN 51097:02.80 Determination of characteristics for prevention of slips

The characteristics of floor coatings according to this standard are assessed in conditions of moisture, on the treads of floor coverings which are used in bathrooms, changing rooms, toilets and similar rooms.

During the execution of the procedure, a liquid is continuously and uniformly applied for testing the floor covering which will start to tilt from its horizontal position and the inclination will grow up to an accepted angle, i.e. an angle when the controller reaches the boundary of safe walking. The person who performs control moves forward-backward on the floor coating which is being controlled, barefoot. Depending on the achieved inclination angle, the tested coverings could be classified in the following groups:

MEAN VALUE OF ANGLE:	SLIP RESISTANCE CLASS:	RECOMMENDED IN:
≥ 12°	A	Bathrooms...
≥ 18°	B	Changing rooms, toilet...
≥ 24°	C	Areas with special requirements

The information about slip resistance of floor tiles is indicated next to the figures of floor tiles. Refers only to tiles that meet the slip resistance class (oil or water).

SRPS U.F2.011 Finishing works in structural engineering – Execution of ceramic works – The standard determines a procedure for wall and floor cladding with ceramic tiles inside of premises, as well as outside.

RECOMMENDATIONS DURING INSTALLATION

- Before installing wall tiles, they need to be immersed in water for better adhesion with the substrate.
- According to the standard SRPS U.F2.011, the tiles must compulsorily be placed with a fugue. The minimal fugue for wall and floor tiles is 3 mm,
- The substrate for placing the tiles should be dry (not freshly plastered) and without structural cracks.
- When buying the tiles, you must compulsorily pay attention to the designation of the caliber and the shade. Tiles with the same designations of caliber and shade should be put exceptionally in the same room.
- The digital mode of tile decoration is characterized by a larger number of faces with different appearance. Before final laying, it is recommendable to place few square meters of tiles to get a visual impression.
- When laying tiles with offset, the recommendation is that maximum offset is 30% of the length.
- After installation of tiles, claim is not possible, except for complaints about the hidden defects of the products, which are related to the durability of the tiles by standard SRPS EN 14411.
- Industrial printer is printing: date, name of the product, class, shade, caliber of the product, id code of the classer for the tile, code and work sheet of product

FLOOR TILES – SRPS EN 14411, Group B Ia, Annex G

TECHNICAL CHARACTERISTICS	NORMS	TOLERANCE % / MM	
		SRPS EN 14411	KK
Length and width	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Thickness	SRPS ISO 10545-2	± 5,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Rectangularity	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Straightness of sides	SRPS ISO 10545-2	± 0,5 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Surface flatness	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	+ 0,20 % / - 0,1 % / max. (+ 1.5 / -0.5) mm
Appearance	SRPS ISO 10545-2	Min. 95% without visible defects	
Water absorption	SRPS ISO 10545-3	≤ 0,50 %	< 0,30 %
Breaking strength	SRPS ISO 10545-4	Thick. ≥ 7.5 mm 1300 N Thick. < 7.5 mm 700 N	> 1600 N > 1100 N
Modulus of rupture (bending strength)	SRPS ISO 10545-4	> 35 N/mm ² > 32 N/mm ²	> 40 N/mm ²
Wear resistance	SRPS ISO 10545-7	The abrasion class and number of cycles are recorded.	Declared by the manufacturer
Coefficient of linear thermal expansion	SRPS ISO 10545-8	Declared value	7×10 ⁻⁶ K ⁻¹
Resistance to thermal shock	SRPS ISO 10545-9	Declared value	Conforms
Crazing resistance	SRPS ISO 10545-11	Declared value	Conforms
Frost resistance	SRPS ISO 10545-12	Declared value	Conforms
Resistance to chemical products for domestic use	SRPS ISO 10545-13	Minimum B	A
Resistance to stains	SRPS ISO 10545-14	Minimum Class 3	Class 5

WALL TILES – SRPS EN 14411, Group B III, Annex K

TECHNICAL CHARACTERISTICS	NORMS	TOLERANCE % / MM	
		SRPS EN 14411	KK
Length and width	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Thickness	SRPS ISO 10545-2	± 10,0 % / max. ± 0.5mm	± 2,5 % / max. ± 0.5mm
Rectangularity	SRPS ISO 10545-2	± 0,5 % / max. ± 2.0mm	± 0,3 % / max. ± 1.5mm
Straightness of sides	SRPS ISO 10545-2	± 0,3 % / max. ± 1.5mm	± 0,2 % / max. ± 1.0mm
Surface flatness	SRPS ISO 10545-2	+ 0,5 % / - 0,3 % / max. (+ 2.0 / -1.5) mm	+ 0,25 % / - 0,1 % / max. (+ 1.5 / -0.5) mm
Appearance	SRPS ISO 10545-2	Min. 95% without visible defects	
Water absorption	SRPS ISO 10545-3	> 10,00 %	> 15,00 %
Breaking strength	SRPS ISO 10545-4	Thick. ≥ 7.5 mm 600 N Thick. < 7.5 mm 200 N	> 600 N
Modulus of rupture (bending strength)	SRPS ISO 10545-4	> 12 N/mm ² > 15 N/mm ²	> 15 N/mm ²
Coefficient of linear thermal expansion	SRPS ISO 10545-8	Declared value	7×10 ⁻⁶ K ⁻¹
Resistance to thermal shock	SRPS ISO 10545-9	Declared value	Conforms
Crazing resistance	SRPS ISO 10545-11	Declared value	Conforms
Resistance to chemical products for domestic use	SRPS ISO 10545-13	Minimum B	A
Resistance to stains	SRPS ISO 10545-14	Minimum Class 3	Class 5

IDENTIFICATION OF PRODUCTS ON BOXES AND ON PALLETS

In the process of automatic packaging, the ceramic tiles are packed in a cardboard boxes in which the industrial printer prints the basic data for identifying the product.

The first printed line contains: date, identification number of the classifier and product name. The second printed line contains: number of work order, product code, product class, product shade and caliber, that is, dimension of the floor tiles:

Each palette of finished product contains a barcode, which helps to identify the tiles.

CONDITIONS OF TILE AND DECOR PACKAGINGS

 | THE TECHNICAL CHARACTERISTICS OF THE PACKAGING ARE SUBJECT TO CHANGE

FLOOR TILES GROUP B Ia

PACKAGING OF FLOOR TILES	FORMAT	THICKNESS OF TILE (MM)	M ² / PC	TILE/ BOX	M ² / BOX	WEIGHT OF BOX (KG)	BOX/ PALLET	M ² / PALLET	WEIGHT OF PALL. (KG)
	33 x 33	7,3	0,1089	16	1,742	27,04	42	73,164	1165,00
	45 x 45	8,2	0,2025	8	1,620	29,40	44	71,280	1325,00
	30 x 60	8,8	0,1800	6	1,080	19,29	48	51,840	960,00

 | THE TECHNICAL CHARACTERISTICS OF THE PACKAGING ARE SUBJECT TO CHANGE

RECTIFIED TILES

PACKAGING OF WALL TILES	FORMAT	THICKNESS OF TILE (MM)	M ² / PC	TILE/ BOX	M ² / BOX	WEIGHT OF BOX (KG)	BOX/ PALLET	M ² / PALLET	WEIGHT OF PALL. (KG)
	29,5 x 59	8,8	0,17405	6	1,044	19,05	48	50,112	945,00
	59 x 59	9,0	0,3481	4	1,392	26,02	30	41,760	810,00

 | THE TECHNICAL CHARACTERISTICS OF THE PACKAGING ARE SUBJECT TO CHANGE

WALL TILES GROUP B III

PACKAGING OF WALL TILES	FORMAT	THICKNESS OF TILE (MM)	M ² / PC	TILE/ BOX	M ² / BOX	WEIGHT OF BOX (KG)	BOX/ PALLET	M ² / PALLET	WEIGHT OF PALL. (KG)
	25 x 50	8,8	0,1250	10	1,250	18,05	48	60,000	895,00
	20 x 60	9,0	0,1200	13	1,560	22,49	44	68,640	1015,00
	30 x 60	9,0	0,1800	6	1,080	16,35	48	51,840	810,00
	25 x 75	9,2	0,1875	7	1,312	20,51	48	62,976	1010,00
	25 x 50 D	8,8	0,1250	10	1,250	18,05	48	60,000	895,00
	20 x 60 D	9,0	0,1200	13	1,560	22,49	44	68,640	1015,00
	25 x 75 D	9,2	0,1875	7	1,312	20,51	48	62,976	1010,00



Zidne pločice
Wall tiles



Podne pločice
Floor tiles



Mat površina
Matte surface



Sjajna površina
Glossy surface



Spoljna
Outdoor



Novo
New



Otpornost na niske temperature
Low temperature resistance



Otpornost na hemikalije u domaćinstvu
Resistance to household chemicals



Protivkliznost površine (voda)
Anti-slip (water)



Protivkliznost površine (ulje)
Anti-slip (oil)



Unutrašnja
Indoor



Otpornost na habanje
Resistance to abrasion



Otpornost na mrlje
Stain resistance



Broj lica
Number of faces





Horgoški put bb.
24420 Kanjiža | Srbija
+ 381 24 4874 211
+ 381 24 4873 344
keramikakanjiza.com